



A name you can trust

MULCHERS

FOR PARKS, GREEN AREAS, LIGHT VEGETATION

ENGLISH

A background of a network diagram with grey nodes and lines on a light grey background. The text is overlaid in white.

A NAME

YOU CAN

TRUST

A solid orange horizontal bar at the bottom of the page.



BERTI

A NAME YOU CAN TRUST

Quality, strength and reliability: the foundations of our work.

Our mission is to offer sturdy, long-lasting equipment designed to minimise the risk of downtime and always ensure the best possible performance in the field.

We are a family that believes in the values of collaboration and trust. Every day, with passion and dedication, we create hundreds of machines designed to meet the genuine needs of those who work the land.

We strictly adhere to the highest quality standards, guided by a strong sense of ethics and the responsibility to provide custom solutions for every client.

We look to the future with energy and determination, ready to evolve so we can stay by your side, with products that continue to make a real difference.



INDEX

FEATURES

page **6**

PARK/P

page **28**

MINI


page **24**

DATA AND
DIMENSIONS

page **34**

GREEN

page **24**



ROTORS

& TOOL HOLDERS

The tube, produced by extrusion, requires no welding and is therefore seamless – a guarantee of strength and reliability. This manufacturing process provides enhanced resistance to accidental impacts.

Square recess tool holders – why is this better?

When it comes to shredding, each design detail makes a

difference. The tool holder is one such detail.

The choice between a hexagonal and a square recess affects not only the shape, it directly affects the holding strength and clamping of the component.

This design feature translates into increased reliability, durability, and operational safety.





The square recess allows for a more precise and stable mechanical connection between the tool (hammer or knife) and the holder.

This means:

- No play between parts, ensuring longer life of the holderbolt connection.

- Reduced risk of slippage or rotation of the bolt.
- Greater resistance to dynamic and torsional stresses.

Each Berti rotor is tested and balanced at high speeds to ensure top-quality performance

MINI

MULCHER FOR GRASS AND LIGHT PRUNING



15-30 HP



Ø 2 cm



STANDARD EQUIPMENT

- Fixed and reversible 3-point linkage, Cat. I.
- Rear roller Ø 114, self-cleaning, height adjustable.
- Free wheel in the gearbox.
- Forged and hardened BERTI hammers type "G".
- PTO 540 rpm.
- Accident prevention protections according to EC directives.



ACCESSORIES ON REQUEST



Skids kit

height adjustable, with anti-wear shoe



Rubber fixed wheels

front mounted, height adjustable



Gearbox PTO 540/1000 rpm

with double free wheel and through shaft



PTO

drive shaft

GREEN

MULCHER FOR GRASS AND LIGHT PRUNING



25-60 HP



Ø 2-3 cm



HARDOX®

STANDARD EQUIPMENT

- Displaceable and reversible 3-points linkage, on chromate tubes, Cat. I.
- Mechanical side-shift.
- Rear roller Ø 114, self-cleaning, height adjustable.
- Gearbox with free wheel and through shaft.
- Counter blades.
- Forged and hardened BERTI hammers type "G1".
- PTO 540 /1000 rpm (reverse pulleys).
- Accident prevention protections according to EC directives.




ACCESSORIES ON REQUEST



Hydraulic side-shift
with hoses and quick couplings



Skids kit
height adjustable, with anti-wear shoe

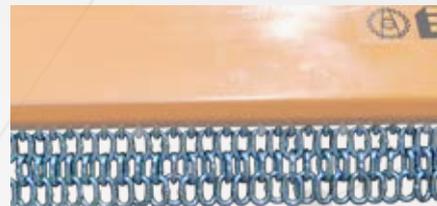

Front protectors
with chains



Rubber fixed wheels
front mounted, height adjustable



Gearbox PTO 540/1000 rpm
with double free wheel and through shaft



PTO
drive shaft



PARK/P at work



50 m

BEWAAR U BIJZONDER
LET OP DE AFSTAND
TUSSEN U EN DE
VOLGENDE WAGEN

PARK/P

MULCHER FOR GRASS AND LIGHT PRUNING



25-60 HP



Ø 2-3 cm



STANDARD EQUIPMENT

- Displaceable 3-point linkage, Cat. I.
- Mechanical side-shift.
- Counter blades.
- Free wheel in the gearbox.
- Rear roller Ø 139, self-cleaning, height adjustable.
- Forged and hardened BERTI hammers type "L" or "YL" blades.
- PTO 540 /1000 rpm (reverse pulleys).
- Accident prevention protections according to EC directives.




ACCESSORIES ON REQUEST



Hydraulic side-shift
with hoses and quick couplings



Skids kit
height adjustable, with anti-wear shoe

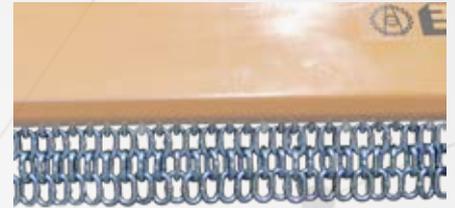

Front protectors
with chains



PTO
drive shaft

DATA


AND DIMENSIONS

| MODEL | cm | min | max | mm | n° | n° | n° | PTO | a | b | c | min | max | mm | mm |
|------------------|-----|-----|-----|----|----|----|----|---------------|----|-----|----|-----|-----|-----|-----|
| MINI 115 | 115 | 15 | 30 | | 32 | / | 3 | 540 | 75 | 129 | 85 | 200 | 200 | 302 | 343 |
| MINI 125 | 125 | 15 | 30 | | 34 | / | 3 | 540 | 75 | 139 | 85 | 205 | 260 | 302 | 343 |
| MINI 145 | 145 | 15 | 30 | | 40 | / | 3 | 540 | 75 | 159 | 85 | 220 | 280 | 302 | 343 |
| GREEN 115 | 115 | 25 | 60 | | 32 | / | 2 | 540 (1000) | 80 | 130 | 95 | 250 | 300 | 334 | 387 |
| GREEN 125 | 125 | 30 | 60 | | 34 | / | 2 | 540 (1000) | 80 | 140 | 95 | 270 | 320 | 334 | 387 |
| GREEN 145 | 145 | 30 | 60 | | 40 | / | 2 | 540 (1000) | 80 | 160 | 95 | 295 | 345 | 334 | 387 |
| GREEN 160 | 160 | 30 | 60 | | 44 | / | 2 | 540 (1000) | 80 | 175 | 95 | 315 | 365 | 334 | 387 |
| GREEN 180 | 180 | 30 | 60 | | 50 | / | 2 | 540 (1000) | 80 | 195 | 95 | 345 | 395 | 334 | 387 |



| MODEL | cm | min | max | mm | n° | n° | n° | PTO | a | b | c | min | max | mm | mm |
|-------------------|-----|-----|-----|----|----|----|----|---------------|----|-----|----|-----|-----|-----|-----|
| PARK/P 105 | 105 | 25 | 60 | | 10 | 30 | 2 | 540 (1000) | 79 | 120 | 80 | 265 | 320 | 364 | 407 |
| PARK/P 115 | 115 | 25 | 60 | | 10 | 30 | 2 | 540 (1000) | 79 | 130 | 80 | 280 | 340 | 364 | 407 |
| PARK/P 125 | 125 | 30 | 60 | | 12 | 36 | 2 | 540 (1000) | 79 | 140 | 80 | 295 | 350 | 364 | 407 |
| PARK/P 135 | 135 | 30 | 60 | | 12 | 36 | 2 | 540 (1000) | 79 | 150 | 80 | 310 | 360 | 364 | 407 |
| PARK/P 145 | 145 | 40 | 60 | | 14 | 42 | 2 | 540 (1000) | 79 | 160 | 80 | 320 | 375 | 364 | 407 |
| PARK/P 160 | 160 | 40 | 60 | | 14 | 42 | 2 | 540 (1000) | 79 | 175 | 80 | 355 | 405 | 364 | 407 |
| PARK/P 180 | 180 | 40 | 60 | | 16 | 48 | 3 | 540 (1000) | 79 | 195 | 80 | 370 | 430 | 364 | 407 |







BERTI MACCHINE AGRICOLE SPA

Via Musi 1/A-3-4

37042 Caldiero (Verona) - Italy

+39 045 61 39 711

bertima.it

info@bertima.it

follow us:

