



A name you can trust

**AGRI
LINE**

ENGLISH



INDEX

4

ABOUT US

OUR STORY,
OUR VALUES

14

MULCHERS

FOR PARKS, GREEN AREAS,
LIGHT VEGETATION

20

MULCHERS

FOR VINEYARD AND
ORCHARD

36

GRASS MOWERS

FOR VINEYARD AND
ORCHARD

42

BETWEEN-ROW

AND WEED
MOWERS



62

**SPECIAL
MULCHER**

WITH "PICK-UP" SYSTEMS

72

MULCHERS

FOR GREEN AREAS, SET-
ASIDE, HEAVY VEGETATION

84

SHREDDERS

FOR STALKS, STRAW, OPEN
FIELD CROP RESIDUES

92

**IN-LINE AND
OFFSET
MULCHERS**

104

**FORESTRY
MULCHERS**

FOR FORESTRY RESIDUES

114

**ROTARY CHAIN
MOWERS**

FOR MOWING GRASS

120

**HYDRAULIC
BOOM**

HEDGE MOWERS

136

**STONE
BURIERS**

144

**ROTARY
TILLERS**

160

**POWER
HARROWS**





MISSION AND VALUES

Quality, strength and reliability: the foundations of our work.

Our mission is to offer sturdy, long-lasting equipment designed to minimise the risk of breakage and always ensure the best possible performance in the field.

We are a family that believes in the values of collaboration and trust. Every day, with passion and dedication, we create hundreds of machines designed to meet the genuine needs of those who

work the land.

We strictly adhere to the highest quality standards, guided by a strong sense of ethics and the responsibility to provide custom solutions for every client.

We look to the future with energy and determination, ready to evolve so we can stay by your side, with products that continue to make a real difference.

SINCE 1920

BY YOUR SIDE, ON THE LAND

1920

Start of business

1979

Mulchers for river banks

1989

Hydraulic brush-cutters for excavators

1959

Relocation to Caldiero

1972

Mulchers for tractors

1995

Mower range





2003

Picker range

2005

Expansion of spare parts department

2024

130,000 machines sold

2002

Tractor-mounted brush-cutter

2013

Ecosprint row crop range

2018

New production facility



IMPLEMENTS

BUILT TO LAST

Every Berti machine is the result of a journey that began with an idea and has been evolving in our facilities for over 60 years.


It's not just about building machines; it's about **creating solutions** for **those who work the land every day**, constantly faced with new challenges.

From frame machining and rotor balancing – the true hallmark of our production – to filling, painting, assembly and packaging,

every stage is carried out with meticulous care and precision, refined through **decades of experience**.

Our attention to detail goes far beyond what meets the eye: even the most concealed components are machined and treated with the same dedication, because we know it's the **details that make the difference**.



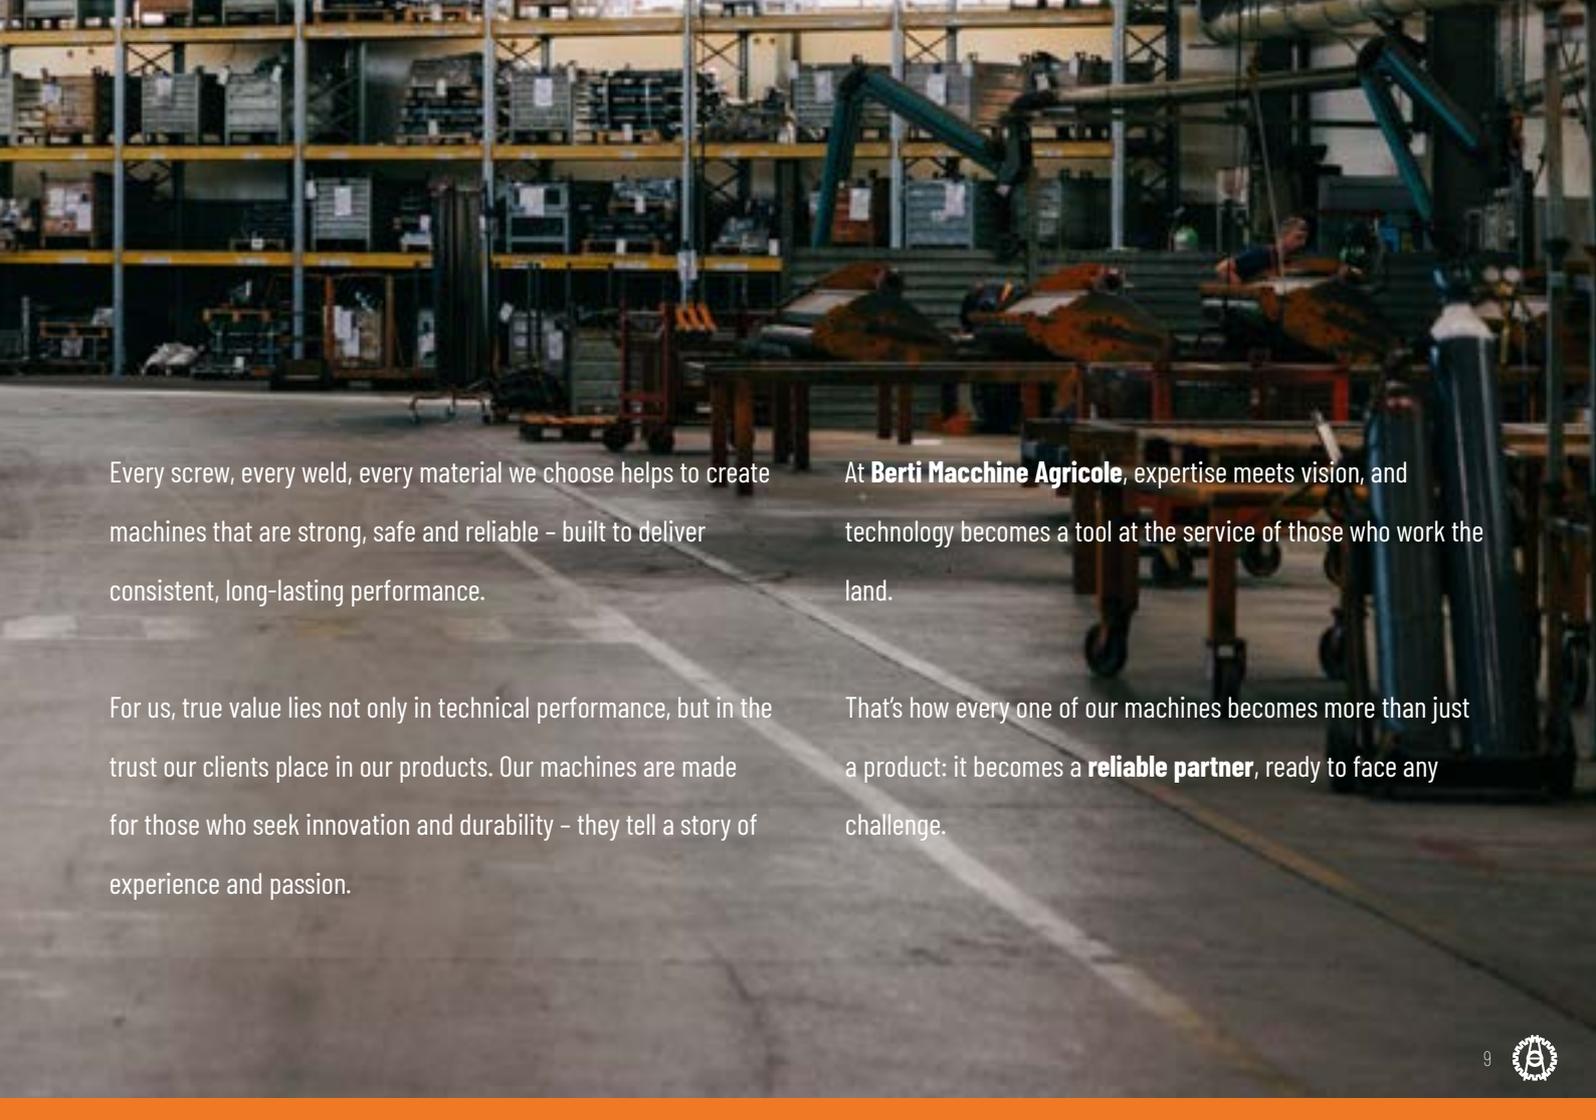

Every screw, every weld, every material we choose helps to create machines that are strong, safe and reliable – built to deliver consistent, long-lasting performance.

For us, true value lies not only in technical performance, but in the trust our clients place in our products. Our machines are made for those who seek innovation and durability – they tell a story of experience and passion.

At **Berti Macchine Agricole**, expertise meets vision, and technology becomes a tool at the service of those who work the land.

That's how every one of our machines becomes more than just a product: it becomes a **reliable partner**, ready to face any challenge.

SUSTAINABILITY AND CERTIFICATION

Our ongoing commitment to **product quality, employee safety** and **environmental protection** is certified according to the highest international standards.

In line with our vision of sustainable development, we have taken decisive action to effectively reduce our environmental impact.

Among these, our **photovoltaic system** allows us to generate and store clean energy, helping to lower the environmental footprint of our facilities.

Our commitment to sustainability extends to the finishing stage as well: our **water-based painting system** significantly reduces the emission of volatile organic compounds (VOCs) compared with traditional solvent-based processes.

**For us, innovation and sustainability go hand in hand.
Every day, we work to build a more responsible future.**



ISO

45001

Occupational health and safety

ISO

14001

Environmental protection

ISO

9001

Quality management system

+1200

Tonnes/year of CO² not released into the atmosphere

+118 KW/h

Generated by the company's photovoltaic system

12050 KG

VOCs not emitted thanks to the use of water-based paint in 2024



AFTER-SALES AND SPARE PARTS

Our relationship with the client doesn't end with the sale - it marks the beginning of a **lasting collaboration**. We believe that true reliability is proven in the way a company supports its clients after the purchase.

That's why we have built a solid **after-sales service** based on technical expertise, responsiveness and genuine care. Every service **request** is handled promptly and attentively, ensuring **machines** are **back in operation as quickly as**

possible

We provide a full range of original spare parts, designed and tested to ensure consistent performance and long-lasting operation.

Every call, every reply, every intervention reflects our philosophy: **to be a reliable partner, ready to ensure continuity and peace of mind for those who work the land every day.**



11

After-sales and spare parts staff

675 M²

Spare parts warehouse area

48H

Request handling

1

Client portal: My Bertl

2


Vertical warehouses

+6500

Shipments/year

MULCHERS

FOR PARKS, GREEN AREAS, LIGHT VEGETATION

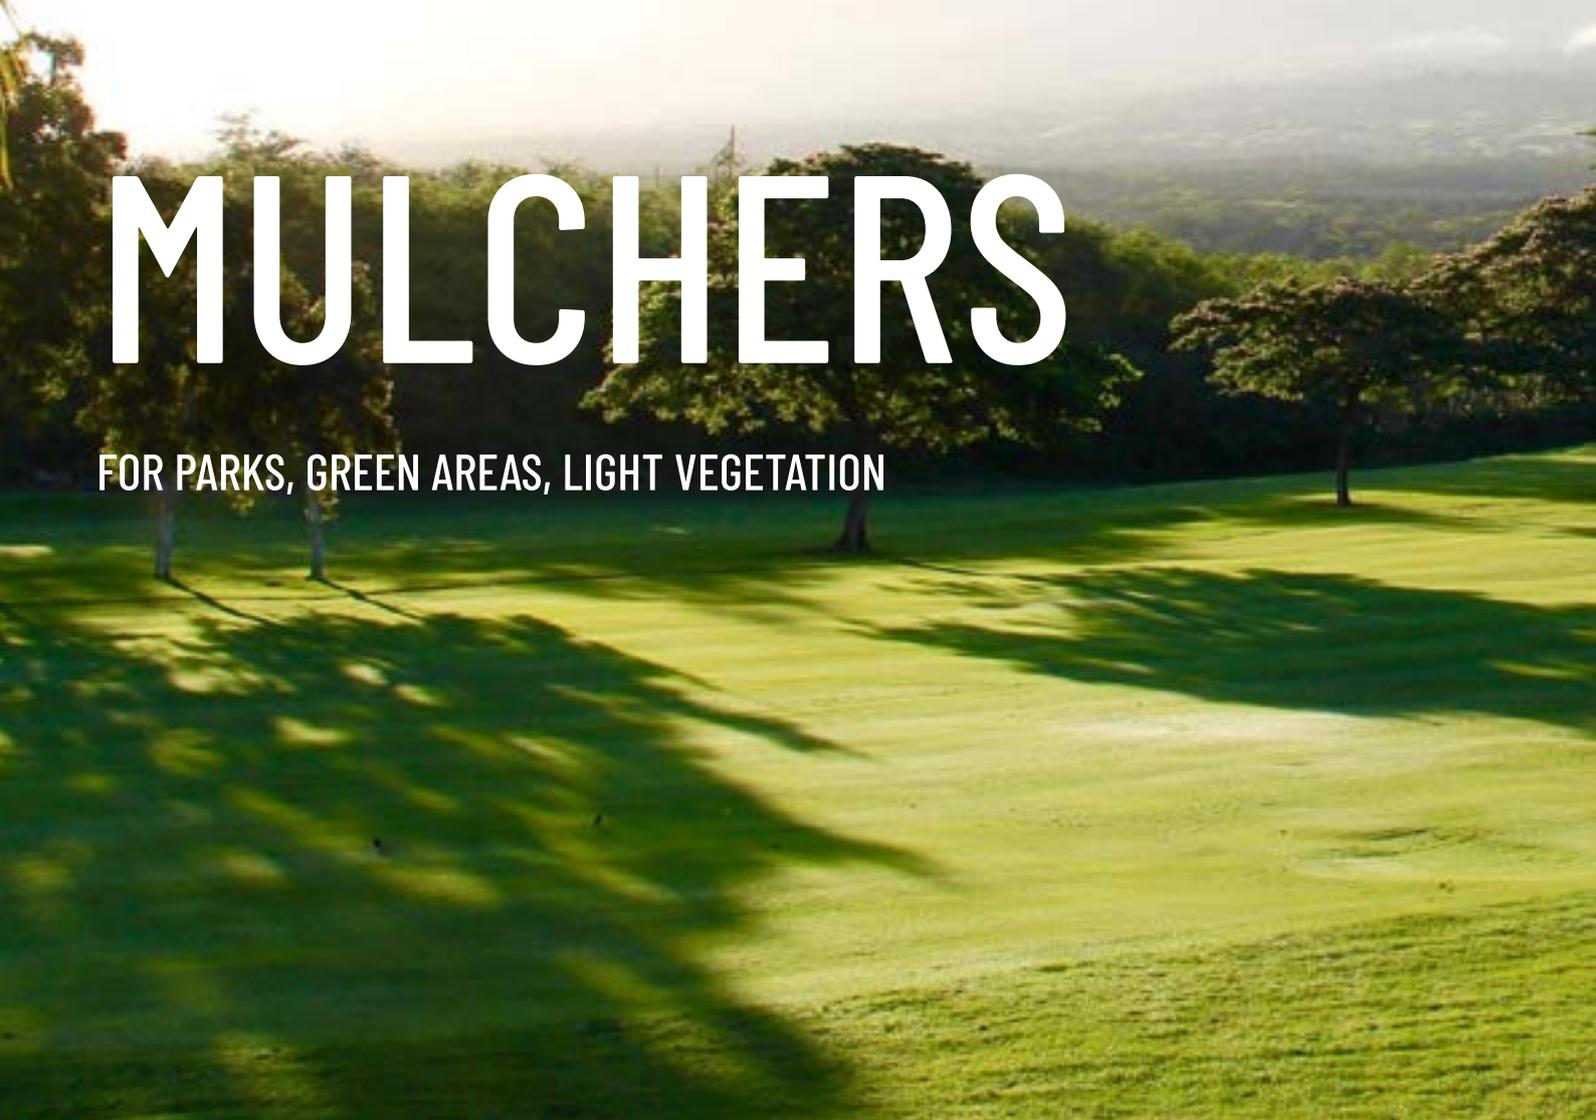



MINI



15-30 HP



Ø 2 cm



| | MINI 115 | | MINI 125 | | MINI 145 | |
|---------------------|----------|-----|----------|-----|----------|-----|
| Working width (cm) | 115 | | 125 | | 145 | |
| G hammers | 32 | | 34 | | 40 | |
| Side shift (mm) | 530 | 620 | 530 | 720 | 615 | 835 |
| Weight min-max (Kg) | 200 | 200 | 205 | 260 | 220 | 280 |

GREEN



25-60 HP



Ø 2-3 cm



HARDOX®

| | GREEN 115 | | GREEN 125 | | GREEN 145 | | GREEN 160 | | GREEN 180 | |
|----------------------------|------------------------|-----|------------------------|-----|------------------------|-----|-------------------------|-----|-------------------------|-----|
| Working width (cm) | 115 | | 125 | | 145 | | 160 | | 180 | |
| Ø1 hammers | 32 | | 34 | | 40 | | 44 | | 50 | |
| Side shift (mm) | 750 + 400 430 - 720 | | 750 + 500 430 - 820 | | 805 + 645 485 - 965 | | 885 + 715 565 - 1035 | | 885 + 915 565 - 1235 | |
| Weight min-max (Kg) | 250 | 300 | 270 | 320 | 295 | 345 | 315 | 365 | 345 | 395 |



PARK/P



25-60 HP



Ø 2-3 cm



| | PARK/P 105 | | PARK/P 115 | | PARK/P 125 | | PARK/P 135 | | PARK/P 145 | | PARK/P 160 | | PARK/P 180 | |
|----------------------------|------------|-----|------------|-----|------------|-----|------------|-----|------------|-----|------------|------|------------|------|
| Working width (cm) | 105 | | 115 | | 125 | | 135 | | 145 | | 160 | | 180 | |
| L hammers | 10 | | 10 | | 12 | | 12 | | 14 | | 14 | | 16 | |
| YL blades | 30 | | 30 | | 36 | | 36 | | 42 | | 42 | | 48 | |
| Side shift (mm) | 590 | 460 | 590 | 560 | 690 | 560 | 775 | 575 | 775 | 675 | 875 | 715 | 875 | 915 |
| | 270 | 780 | 270 | 880 | 370 | 880 | 455 | 895 | 455 | 995 | 555 | 1045 | 555 | 1245 |
| Weight min-max (Kg) | 265 | 320 | 280 | 340 | 295 | 350 | 310 | 360 | 320 | 375 | 355 | 405 | 370 | 430 |



MULCHERS

FOR VINEYARD AND ORCHARD





AF



30-60 HP



Ø 4-5 cm



STRENX

| | AF 135 | | AF 145 | | AF 160 | | AF 180 | |
|---------------------|--------|-----|--------|-----|--------|-----|--------|-----|
| Working width (cm) | 135 | | 145 | | 160 | | 180 | |
| P hammers | 12 | | 14 | | 14 | | 16 | |
| YP blades | 36 | | 42 | | 42 | | 48 | |
| Side shift (mm) | | | | | | | | |
| Weight min-max (Kg) | 375 | 460 | 400 | 480 | 425 | 500 | 460 | 525 |

AF/L



Ø 5-6 cm



40-100 HP



STRENX

| | AF/L 105 | AF/L 115 | AF/L 125 | AF/L 135 | AF/L 145 | AF/L 160 | AF/L 180 | AF/L 200 | AF/L 220 NEW |
|--|------------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|--------------------------|--------------------------|--------------------------|
| Working width (cm) | 105 | 115 | 125 | 135 | 145 | 160 | 180 | 200 | 220 |
| P hammers | 10 | 10 | 12 | 12 | 14 | 14 | 16 | 18 | 20 |
| YP blades | 30 | 30 | 36 | 36 | 42 | 42 | 48 | 54 | 58 |
| Side shift (mm) | 600 + 450 360 - 690 | 650 + 500 360 - 790 | 700 + 550 360 - 890 | 700 + 650 360 - 990 | 700 + 750 360 - 1090 | 700 + 900 360 - 1240 | 700 + 1100 360 - 1440 | 810 + 1190 440 - 1560 | 975 + 1225 600 - 1600 |
| Side shift (central linkage) (mm) | / | / | / | / | / | 980 + 620 605 - 995 | 980 + 820 605 - 1195 | 1150 + 850 780 - 1220 | 1255 + 945 880 - 1320 |
| Weight min-max (kg) | 455 - 535 | 465 - 545 | 475 - 560 | 485 - 575 | 505 - 600 | 550 - 645 | 595 - 690 | 645 - 740 | 695 - 790 |



AF/LE *NEW*



60-100 HP



Ø 5-6 cm



STRENX

| | AF/LE 160 | AF/LE 180 | AF/LE 200 | AF/LE 220 |
|---------------------|-----------------------|-----------------------|------------------------|------------------------|
| Working width (cm) | 160 | 180 | 200 | 220 |
| P hammers | 14 | 16 | 18 | 20 |
| YP blades | 42 | 48 | 54 | 60 |
| Side shift (mm) | 940 660 0 1600 | 940 860 0 1790 | 940 1060 0 2130 | 940 1260 0 2330 |
| Weight min-max (Kg) | 540 595 | 585 640 | 630 685 | 675 730 |

AF/REV



40-100 HP



Ø 5-6 cm



STRENX

| | AF/REV 105 | AF/REV 115 | AF/REV 125 | AF/REV 135 | AF/REV 145 | AF/REV 160 | AF/REV 180 | AF/REV 200 | AF/REV 220 NEW |
|--|------------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|--------------------------|--------------------------|--------------------------|
| Working width (cm) | 105 | 115 | 125 | 135 | 145 | 160 | 180 | 200 | 220 |
| P hammers | 10 | 10 | 12 | 12 | 14 | 14 | 16 | 18 | 20 |
| YP blades | 30 | 30 | 36 | 36 | 42 | 42 | 48 | 54 | 60 |
| Side shift (mm) | 600 450 360 690 | 650 500 360 790 | 700 550 360 890 | 700 650 360 990 | 700 750 360 1090 | 700 900 360 1240 | 700 1100 360 1440 | 810 1190 440 1560 | 980 1220 605 1595 |
| Side shift (central linkage) (mm) | / | / | / | / | / | 980 620 605 995 | 980 820 605 1195 | 1150 850 780 1220 | 1260 940 885 1315 |
| Weight min-max (Kg) | 455 535 | 465 545 | 475 560 | 485 575 | 505 600 | 550 645 | 595 690 | 645 740 | 695 790 |



TFB/L *NEW*



60-110 HP



Ø 7 cm



HARDOX®

| | TFB/L 170 | TFB/L 190 | TFB/L 210 | TFB/L 230 |
|---------------------|-----------|-----------|-----------|-----------|
| Working width (cm) | 170 | 190 | 210 | 230 |
| P hammers | 16 | 18 | 18 | 20 |
| YP blades | 48 | 54 | 60 | 60 |
| Side shift (mm) | | | | |
| Weight min-max (Kg) | 590 750 | 630 790 | 670 830 | 710 870 |

TFB/LR *NEW*



60-110 HP



Ø 7 cm



HARDOX®

| | TFB/LR 170 | TFB/LR 190 | TFB/LR 210 | TFB/LR 230 |
|---------------------|-------------------------|--------------------------|--------------------------|--------------------------|
| Working width (cm) | 170 | 190 | 210 | 230 |
| P hammers | 16 | 18 | 18 | 20 |
| YP blades | 48 | 54 | 60 | 60 |
| Side shift (mm) | 810 890 440 1260 | 810 1090 440 1460 | 975 1125 600 1500 | 975 1325 600 1700 |
| Weight min-max (Kg) | 660 740 | 700 780 | 740 820 | 780 860 |



ZETA



60-110 HP



Ø 5-6 cm



STRENX

| | ZETA 150 | ZETA 170 | ZETA 190 | ZETA 210 | ZETA 230 | ZETA 250 |
|---------------------|------------------------|--------------------------|--------------------------|--------------------------|--------------------------|----------------------------|
| Working width (cm) | 150 | 170 | 190 | 210 | 230 | 250 |
| P hammers | 8+8 | 8+8 | 10+10 | 10+10 | 12+12 | 12+12 |
| YP blades | 24+24 | 24+24 | 30+30 | 30+30 | 36+36 | 36+36 |
| Side shift (mm) | 940 + 560 560 + 940 | 1040 + 660 660 + 1040 | 1140 + 760 760 + 1140 | 1240 + 860 860 + 1240 | 1340 + 960 960 + 1340 | 1440 + 1060 1060 + 1440 |
| Weight min-max (Kg) | 690 800 | 740 850 | 790 900 | 840 950 | 890 1000 | 940 1050 |

TFB/Y



60-110 HP



Ø 8 cm



HARDOX®

| | TFB/Y 120 | | TFB/Y 140 | | TFB/Y 160 | | TFB/Y 180 | | TFB/Y 200 | | TFB/Y 220 | | TFB/Y 250 | |
|--|-----------|-----|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|
| Working width (cm) | 120 | | 140 | | 160 | | 180 | | 200 | | 220 | | 250 | |
| A hammers | 12 | | 12 | | 14 | | 16 | | 18 | | 20 | | 22 | |
| YA blades | 36 | | 36 | | 42 | | 48 | | 54 | | 60 | | 66 | |
| Side shift (mm) | 685 | 515 | 875 | 525 | 875 | 725 | 875 | 925 | 875 | 1125 | 1040 | 1160 | 1040 | 1460 |
| | 315 | 885 | 355 | 1045 | 355 | 1245 | 355 | 1445 | 355 | 1645 | 520 | 1680 | 520 | 1980 |
| Side shift (central linkage) (mm) | / | | / | | 1046 | 554 | 1046 | 754 | 1216 | 784 | 1326 | 874 | 1560 | 940 |
| | | | | | 524 | 1076 | 524 | 1276 | 694 | 1306 | 804 | 1396 | 1040 | 1460 |
| Weight min-max (Kg) | 560 | 720 | 610 | 770 | 660 | 840 | 700 | 890 | 740 | 940 | 790 | 990 | 890 | 1100 |



TFB/YE *NEW*



70-110 HP



Ø 8 cm



HARDOX®

| | TFB/YE 160 | | TFB/YE 180 | | TFB/YE 200 | | TFB/YE 220 | |
|---------------------|------------|------|------------|------|------------|------|------------|------|
| Working width (cm) | 160 | | 180 | | 200 | | 220 | |
| A hammers | 14 | | 16 | | 18 | | 20 | |
| YA blades | 42 | | 48 | | 54 | | 60 | |
| Side shift (mm) | 930 | 670 | 930 | 870 | 930 | 1070 | 930 | 725 |
| | / | 1730 | / | 1930 | / | 2130 | / | 2330 |
| Weight min-max (Kg) | 660 | 850 | 700 | 890 | 740 | 940 | 790 | 990 |

TFB/C



60-110 HP



Ø 8 cm



HARDOX®

| | TFB/C 140 | | TFB/C 160 | | TFB/C 180 | | TFB/C 200 | | TFB/C 220 | | TFB/C 250 | |
|--|------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|--------------|--------------|--------------|
| Working width (cm) | 140 | | 160 | | 180 | | 200 | | 220 | | 250 | |
| A hammers | 12 | | 14 | | 16 | | 18 | | 20 | | 22 | |
| YA blades | 36 | | 42 | | 48 | | 54 | | 60 | | 66 | |
| Side shift (mm) | 875 355 | 525 1045 | 875 355 | 725 1245 | 875 355 | 925 1465 | 875 355 | 1125 1645 | 1040 520 | 1160 1680 | 1040 520 | 1460 1980 |
| Side shift (central linkage) (mm) | / | | 1046 524 | 554 1076 | 1046 524 | 754 1276 | 1216 694 | 784 1306 | 1326 804 | 874 1396 | 1560 1040 | 940 1460 |
| Weight min-max (Kg) | 650 | 810 | 700 | 880 | 740 | 930 | 780 | 980 | 830 | 1030 | 930 | 1150 |



TFB/REV



60-110 HP



Ø 8 cm



HARDOX®

| | TFB/REV 140 | | TFB/REV 160 | | TFB/REV 180 | | TFB/REV 200 | | TFB/REV 220 | |
|--|-------------------------|-----|--------------------------|-----|--------------------------|-----|--------------------------|------|---------------------------|------|
| Working width (cm) | 140 | | 160 | | 180 | | 200 | | 220 | |
| A hammers | 12 | | 14 | | 16 | | 18 | | 20 | |
| YA blades | 36 | | 42 | | 48 | | 54 | | 60 | |
| Side shift (mm) | 875 525 355 1045 | | 875 725 355 1245 | | 875 925 355 1455 | | 875 1125 355 1645 | | 1040 1160 520 1680 | |
| Side shift (central linkage) (mm) | / | | 1025 575 505 1095 | | 1025 775 505 1295 | | 1195 805 675 1325 | | 1305 895 785 1415 | |
| Weight min-max (Kg) | 710 | 830 | 750 | 890 | 800 | 950 | 840 | 1000 | 890 | 1050 |

TFB/M



70-150 HP



Ø 10-12 cm



STRENX

| | TFB/M 160 <i>NEW</i> | | TFB/M 180 | | TFB/M 200 | | TFB/M 200 S | | TFB/M 220 | | TFB/M 250 | | TFB/M 280 | | TFB/M 300 | |
|--|-------------------------|------|--------------|------|--------------|------|----------------|------|--------------|------|--------------|------|--------------|------|--------------|------|
| Working width (cm) | 160 | | 180 | | 200 | | 200 | | 220 | | 250 | | 280 | | 300 | |
| M hammers | 14 | | 16 | | 18 | | 18 | | 20 | | 22 | | 26 | | 28 | |
| Side shift (mm) | 880 | 720 | 956 | 844 | 1046 | 954 | 1046 | 954 | 1046 | 1154 | 1046 | 1454 | 1046 | 1754 | 1046 | 1954 |
| | 360 | 1240 | 434 | 1366 | 524 | 1476 | 524 | 1476 | 524 | 1646 | 524 | 1976 | 524 | 2276 | 524 | 2476 |
| Side shift (central linkage) (mm) | / | | / | | / | | / | | 1320 | 880 | 1320 | 1180 | 1616 | 1184 | 1616 | 1384 |
| | | | | | | | | | 800 | 1400 | 800 | 1700 | 1094 | 1706 | 1094 | 1906 |
| Weight min-max (Kg) | 825 | 940 | 875 | 995 | 925 | 1050 | 990 | 1125 | 1050 | 1195 | 1125 | 1280 | 1195 | 1365 | 1235 | 1415 |



TFB/ME



80-150 HP



Ø 10-12 cm



STRENX

| | TFB/ME 200 | | TFB/ME 220 | | TFB/ME 250 | |
|-------------------------------|------------|------|------------|------|------------|------|
| Working width (cm) | 200 | | 220 | | 250 | |
| H hammers | 18 | | 20 | | 22 | |
| Side shift (mm) pos. 1 | | | | | | |
| Side shift (mm) pos. 2 | | | | | | |
| Weight min-max (Kg) | 1110 | 1190 | 1190 | 1280 | 1280 | 1370 |

SF/2 *NEW*



80-150 HP



Ø 10-12 cm



HARDOX®

| | SF2 180 | SF2 200 | SF2 220 | SF2 250 | | | | |
|---------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Working width (cm) | 180 | 200 | 220 | 250 | | | | |
| M hammers | 16 | 18 | 20 | 22 | | | | |
| Side shift (mm) | 520 1040 | 1280 760 | 730 1250 | 1270 750 | 800 1320 | 1400 880 | 980 1500 | 1520 1000 |
| Weight min-max (Kg) | 1050 | 1150 | 1125 | 1225 | 1195 | 1295 | 1280 | 1380 |





GRASS MOWERS

FOR VINEYARD AND ORCHARD



EUROSTAR



40 -120 HP



| | EUROSTAR 160 | EUROSTAR 180 | EUROSTAR 200 | EUROSTAR 220 | EUROSTAR 240 |
|-----------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Working width (cm) | 158 | 178 | 198 | 218 | 238 |
| Articulated and ventilated blades | 4 | 4 | 4 | 4 | 4 |
| Side shift (mm) | 790 790 | 890 890 | 990 990 | 1090 1090 | 1190 1190 |
| Weight min (kg) | 390 | 420 | 470 | 490 | 520 |



B-FLEX



40 -120 HP



| | B-FLEX 120-150 | | B-FLEX 140-195 | | B-FLEX 175-240 | | B-FLEX 190-260 | | B-FLEX 220-300 | |
|--|-------------------|-----|-------------------|-----|-------------------|-----|-------------------|-----|-------------------|-----|
| Working width min-max (cm) | 119 | 147 | 142 | 190 | 175 | 240 | 192 | 257 | 220 | 300 |
| Articulated and ventilated blades | 4 | | 4 | | 4 | | 4 | | 4 | |
| Side shift (mm) | 600 750 | | 710 975 | | 880 1200 | | 960 1300 | | 1100 1500 | |
| Weight min (Kg) | 470 | | 530 | | 607 | | 715 | | 850 | |



AV



50 -120 HP



| | AV 180-230 Ø 65 | | AV 180-245 Ø 80 | | AV 200-250 Ø 65 | | AV 200-265 Ø 80 | | AV 235-290 Ø 65 | |
|--|--------------------|-----|--------------------|-----|--------------------|-----|--------------------|-----|--------------------|-----|
| Working width min-max (cm) | 176 | 230 | 192 | 243 | 200 | 252 | 200 | 266 | 235 | 287 |
| Articulated and ventilated blades | 4 | | 4 | | 4 | | 4 | | 4 | |
| Side shift (mm) | | | | | | | | | | |
| Weight min (kg) | 595 | | 605 | | 620 | | 630 | | 680 | |
| | AV 235-300 Ø 80 | | AV 260-320 Ø 65 | | AV 260-335 Ø 80 | | AV 310-360 Ø 65 | | AV 310-375 Ø 80 | |
| Working width min-max (cm) | 240 | 299 | 264 | 317 | 264 | 331 | 312 | 366 | 316 | 376 |
| Articulated and ventilated blades | 4 | | 5 | | 5 | | 5 | | 5 | |
| Side shift (mm) | | | | | | | | | | |
| Weight min (kg) | 690 | | 700 | | 710 | | 760 | | 770 | |



VARIANT



50 -120 HP



| | VARIANT 160-260 Ø 60 | | VARIANT 160-260 Ø 70 | | VARIANT 180-280 Ø 60 | | VARIANT 180-300 Ø 70 | | VARIANT 180-320 Ø 80 | | VARIANT 200-300 Ø 60 | | VARIANT 200-320 Ø 70 | |
|--|-------------------------|------|-------------------------|------|-------------------------|------|-------------------------|------|-------------------------|------|-------------------------|------|-------------------------|------|
| Working width min-max (cm) | 158 | 266 | 158 | 284 | 178 | 280 | 178 | 298 | 178 | 315 | 198 | 300 | 198 | 318 |
| Articulated and ventilated blades | 4+8 | | 4+8 | | 4+8 | | 4+8 | | 4+8 | | 4+8 | | 4+8 | |
| Side shift (mm) | 800 | 800 | 800 | 800 | 900 | 900 | 900 | 900 | 900 | 900 | 1000 | 1000 | 1000 | 1000 |
| | 1330 | 1330 | 1420 | 1420 | 1400 | 1400 | 1490 | 1490 | 1570 | 1570 | 1500 | 1500 | 1590 | 1590 |
| Weight min (kg) | 520 | 620 | 530 | 630 | 550 | 650 | 560 | 660 | 570 | 670 | 590 | 690 | 600 | 700 |
| | VARIANT 200-340 Ø 80 | | VARIANT 200-360 Ø 90 | | VARIANT 220-320 Ø 60 | | VARIANT 220-340 Ø 70 | | VARIANT 220-360 Ø 80 | | VARIANT 220-380 Ø 90 | | VARIANT 240-400 Ø 90 | |
| Working width min-max (cm) | 198 | 343 | 198 | 352 | 218 | 321 | 218 | 341 | 218 | 356 | 226 | 375 | 238 | 399 |
| Articulated and ventilated blades | 4+8 | | 4+8 | | 4+8 | | 4+8 | | 4+8 | | 4+8 | | 4+8 | |
| Side shift (mm) | 1000 | 1000 | 1000 | 1000 | 1100 | 1100 | 1100 | 1100 | 1100 | 1100 | 1100 | 1100 | 1200 | 1200 |
| | 1720 | 1720 | 1760 | 1760 | 1610 | 1610 | 1710 | 1710 | 1780 | 1780 | 1880 | 1880 | 2000 | 2000 |
| Weight min (kg) | 610 | 710 | 620 | 720 | 630 | 730 | 640 | 740 | 650 | 750 | 660 | 760 | 680 | 780 |



A photograph of a vineyard with rows of grapevines. The vines are green and leafy, and there is a path between the rows. The text is overlaid on the image.

BETWEEN-ROW AND WEED MOWERS




ECOLOGY/AD *NEW*



COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | | | | |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| AF | 135 | 145 | 160 | 180 | | | | | |
| AF/L | 105 | 115 | 125 | 135 | 145 | 160 | 180 | 200 | 220 |
| AF/L central linkage | 160 | 180 | 200 | 220 | | | | | |
| TFB/L | 170 | 190 | 210 | 230 | | | | | |
| TFB/Y | 140 | 160 | 180 | 200 | 220 | 250 | | | |
| TFB/Y central linkage | 160 | 180 | 200 | 220 | 250 | | | | |
| TFB/C | 140 | 160 | 180 | 200 | 220 | 250 | | | |
| TFB/C central linkage | 160 | 180 | 200 | 220 | 250 | | | | |

ECOLOGY/AD2 *NEW*

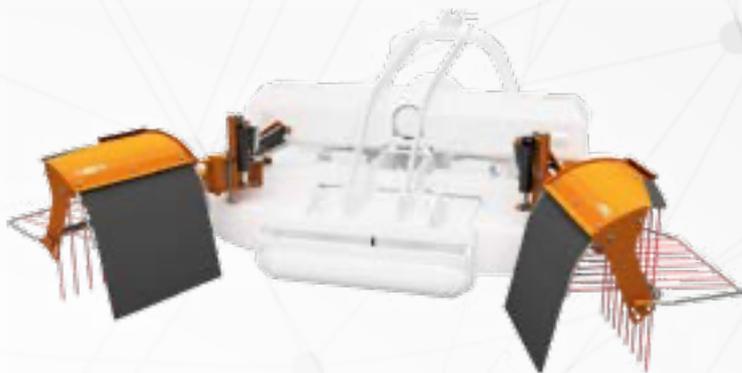

COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|----------|---------|---------|---------|---------|------|------|
| ZETA | 150* | 170* | 190* | 210* | 230* | 250* |
| EUROSTAR | 160 | 180 | 200 | 220 | 240 | |
| B-FLEX | 140-195 | 175-240 | 190-260 | 220-300 | | |

* limited movement of the mulcher



ECOLOGY *NEW*



COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|--------------------------|-----|-----|-----|-----|-----|-----|
| AF/L | 135 | 145 | 160 | 180 | 200 | 220 |
| AF/L central linkage | 160 | 180 | 200 | 220 | | |
| TFB/L | 170 | 190 | 210 | 230 | | |
| TFB/Y | 140 | 160 | 180 | 200 | 220 | 250 |
| TFB/Y central linkage | 160 | 180 | 200 | 220 | 250 | |
| TFB/C | 140 | 160 | 180 | 200 | 220 | 250 |
| TFB/C central linkage | 160 | 180 | 200 | 220 | 250 | |

ECOSPRINT/M



HARDOX

COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|--------------------------|-----|-----|-----|-----|-----|-----|
| AF/L | 135 | 145 | 160 | 180 | 200 | 220 |
| AF/L central linkage | 160 | 180 | 200 | 220 | | |
| TFB/L | 170 | 190 | 210 | 230 | | |
| TFB/Y | 140 | 160 | 180 | 200 | 220 | 250 |
| TFB/Y central linkage | 160 | 180 | 200 | 220 | 250 | |
| TFB/C | 140 | 160 | 180 | 200 | 220 | 250 |
| TFB/C central linkage | 160 | 180 | 200 | 220 | 250 | |



RM/AD *NEW*



COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | | | | |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| AF | 135 | 145 | 160 | 180 | | | | | |
| AF/L | 105 | 115 | 125 | 135 | 145 | 160 | 180 | 200 | 220 |
| AF/L central linkage | 160 | 180 | 200 | 220 | | | | | |
| TFB/L | 170 | 190 | 210 | 230 | | | | | |
| TFB/Y | 120 | 140 | 160 | 180 | 200 | 220 | 250 | | |
| TFB/Y central linkage | 160 | 180 | 200 | 220 | 250 | | | | |
| TFB/C | 140 | 160 | 180 | 200 | 220 | 250 | | | |
| TFB/C central linkage | 160 | 180 | 200 | 220 | 250 | | | | |

RM *NEW*



COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|--------------------------|-----|-----|-----|-----|-----|-----|
| AF/L central linkage | 160 | 180 | 200 | 220 | | |
| TFB/L | 170 | 190 | 210 | 230 | | |
| TFB/Y | 140 | 160 | 180 | 200 | 220 | 250 |
| TFB/Y central linkage | 160 | 180 | 200 | 220 | 250 | |
| TFB/C | 140 | 160 | 180 | 200 | 220 | 250 |
| TFB/C central linkage | 160 | 180 | 200 | 220 | 250 | |



RM/2 *NEW*



DISK Ø 450 - COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|---------------|-----|-----|-----|-----|-----|-----|
| AF/L | 135 | 145 | 160 | 180 | 200 | 220 |
| TFB/L | 170 | 190 | 210 | 230 | | |
| TFB/Y - TFB/C | 140 | 160 | 180 | 200 | 220 | 250 |

DISK Ø 650 - COMPATIBILITY WITH MODELS IN THE RANGE


| | | | | | | |
|---------------|-----|-----|-----|-----|-----|-----|
| AF/L | 145 | 160 | 180 | 200 | 220 | |
| TFB/L | 170 | 190 | 210 | 230 | | |
| TFB/Y - TFB/C | 140 | 160 | 180 | 200 | 220 | 250 |

DISK Ø 800 - COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|---------------|-----|-----|-----|-----|-----|--|
| AF/L | 180 | 200 | 220 | | | |
| TFB/L | 190 | 210 | 230 | | | |
| TFB/Y - TFB/C | 160 | 180 | 200 | 220 | 250 | |



RI *NEW*

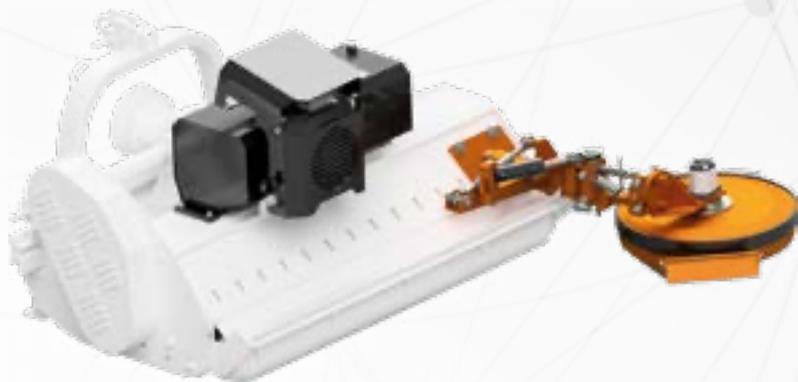

COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | | | | |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| AF/L | 105 | 115 | 125 | 135 | 145 | 160 | 180 | 200 | 220 |
| AF/L central linkage | 160 | 180 | 200 | 220 | | | | | |
| TFB/L | 170 | 190 | 210 | 230 | | | | | |
| TFB/Y | 140 | 160 | 180 | 200 | 220 | 250 | | | |
| TFB/Y central linkage | 160 | 180 | 200 | 220 | 250 | | | | |
| TFB/C | 140 | 160 | 180 | 200 | 220 | 250 | | | |
| TFB/C central linkage | 160 | 180 | 200 | 220 | 250 | | | | |



RI/2 *NEW*



DISK Ø 450 - COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|---------------|-----|-----|-----|-----|-----|-----|
| AF/L | 145 | 160 | 180 | 200 | 220 | |
| TFB/L | 170 | 190 | 210 | 230 | | |
| TFB/Y - TFB/C | 140 | 160 | 180 | 200 | 220 | 250 |

DISK Ø 600 - COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|---------------|-----|-----|-----|-----|-----|--|
| AF/L | 160 | 180 | 200 | 220 | | |
| TFB/L | 170 | 190 | 210 | 230 | | |
| TFB/Y - TFB/C | 160 | 180 | 200 | 220 | 250 | |

DISK Ø 800 - COMPATIBILITY WITH MODELS IN THE RANGE

| | | | | | | |
|---------------|-----|-----|-----|-----|--|--|
| AF/L | 200 | 220 | | | | |
| TFB/L | 190 | 210 | 230 | | | |
| TFB/Y - TFB/C | 180 | 200 | 220 | 250 | | |

SPEEDY



COMPATIBILITY WITH MODELS IN THE RANGE

| TFB/Y - TFB/C | 120 | 140 | 160 | 180 | 200 | 220 | 250 |
|---------------|-----|-----|-----|-----|-----|-----|-----|
| | | | | | | | |




ECOSPRINT/EASY



30 -80 HP



HARDOX

| | ECOSPRINT/EASY 90/140 | | ECOSPRINT/EASY 140/240 | |
|---------------------|---|-----|---|-----|
| Working width (cm) | 75 | | 75 | |
| No. of wires | 12 | | 12 | |
| Side shift (mm) |  | |  | |
| Weight min-max (Kg) | 480 | 540 | 500 | 580 |

ECOSPRINT



40 -100 HP



HARDOX®

| | ECOSPRINT 90/140 | | ECOSPRINT 140/240 | |
|---------------------|---|-----|---|-----|
| Working width (cm) | 75 | | 75 | |
| No. of wires | 16 | | 16 | |
| Side shift (mm) |  | |  | |
| Weight min-max (Kg) | 480 | 540 | 500 | 580 |



ECOSPRINT/D



50 -100 HP



HARDOX

| | ECOSPRINT/D 180/230 | | ECOSPRINT/D 230/350 | | ECOSPRINT/D 230/400 | |
|---------------------|------------------------|------|------------------------|------|------------------------|------|
| Working width (cm) | 75x2 | | 75x2 | | 75x2 | |
| No. of wires | 16+16 | | 16+16 | | 16+16 | |
| Side shift (mm) | 900 | 900 | 1150 | 1150 | 1150 | 1150 |
| | 1800 | 1800 | 1750 | 1750 | 2000 | 2000 |
| Weight min-max (Kg) | 740 | 780 | 760 | 800 | 780 | 820 |

ECOROW



50 -100 HP



HARDOX[®]

| | ECOROW (SV2) | | ECOROW (SV3) | | ECOROW (SV4) | | ECOROW (SF2) | | ECOROW (SF3) | | ECOROW (SF4) | |
|---------------------|--------------|-----|--------------|-----|--------------|-----|--------------|-----|--------------|-----|--------------|-----|
| Front stars | 2 | | 3 | | 4 | | 2 | | 3 | | 4 | |
| Weight min-max (Kg) | 300 | 390 | 310 | 400 | 320 | 410 | 390 | 480 | 400 | 490 | 410 | 500 |



ECOROW/D



50 -100 HP



HARDOX

| | ECOROW/D (DV2) | | ECOROW/D (DV3) | | ECOROW/D (DV4) | | ECOROW/D (DF2) | | ECOROW/D (DF3) | | ECOROW/D (DF4) | |
|---------------------|----------------|-----|----------------|-----|----------------|-----|----------------|-----|----------------|-----|----------------|-----|
| Front stars | 2+2 | | 3+3 | | 4+4 | | 2+2 | | 3+3 | | 4+4 | |
| Weight min-max (Kg) | 440 | 615 | 460 | 635 | 480 | 655 | 620 | 795 | 640 | 815 | 660 | 835 |



RM AD/TL



40 -100 HP



HARDOX

| | RM AD/TL 90/140 | | RM AD/TL 140/240 | |
|---------------------|---|-----|---|-----|
| Disk diameter (cm) | 65 | | 65 | |
| No. of blades | 2 | | 2 | |
| Side shift (mm) |  | |  | |
| Weight min-max (Kg) | 225 | 255 | 255 | 285 |



SPEEDY/TL



50 -100 HP



HARDOX

| | SPEEDY/TL 140/240 | |
|---------------------|---|-----|
| Working width (cm) | 60 | |
| Hammers | 10 | |
| Side shift (mm) |  | |
| Weight min-max (Kg) | 570 | 630 |





SPECIAL MULCHERS

WITH "PICK-UP" SYSTEMS





PICKER®/L



60-100 HP



Ø 5 cm



| | PICKER/L 85 | | PICKER/L 115 | | PICKER/L 135 | | PICKER/L 145 | | PICKER/L 160 | | PICKER/L 180 <i>NEW</i> | |
|----------------------------|-------------|-----|--------------|-----|--------------|-----|--------------|-----|--------------|-----|-------------------------|-----|
| Working width (cm) | 85 | 490 | 115 | 610 | 135 | 640 | 145 | 700 | 160 | 790 | 180 | 930 |
| P hammers | 12 | 580 | 14 | 675 | 16 | 700 | 18 | 735 | 22 | 830 | 24 | 890 |
| Weight min-max (Kg) | 460 | 580 | 580 | 610 | 640 | 675 | 700 | 735 | 790 | 830 | 890 | 930 |

PICKER®



60-120 HP



Hammers Ø 8 cm - Forestry Ø 12-15 cm



| | PICKER 100 | | PICKER 120 | | PICKER 140 | | PICKER 150 | | PICKER 160 | | PICKER 180 | | PICKER 200 | |
|----------------------------|------------|-----|------------|------|------------|------|------------|------|------------|------|------------|------|------------|------|
| Working width (cm) | 100 | 950 | 120 | 1000 | 140 | 1100 | 150 | 1180 | 160 | 1250 | 180 | 1310 | 200 | 1370 |
| A hammers | 14 | | 16 | | 18 | | 20 | | 22 | | 24 | | 26 | |
| DF2 forestry tooth | / | | / | | 26 | | 28 | | 30 | | 34 | | 38 | |
| Weight min-max (Kg) | 800 | 950 | 850 | 1000 | 950 | 1100 | 1010 | 1180 | 1070 | 1250 | 1130 | 1310 | 1190 | 1370 |



PICKER[®]/F



80-140 HP



Hammers Ø 8 cm - Forestry Ø 12-15 cm



| | PICKER/F 160 | | PICKER/F 180 | |
|---------------------|--------------|------|--------------|------|
| Working width (cm) | 160 | | 180 | |
| A hammers | 22 | | 24 | |
| DF2 forestry tooth | 30 | | 34 | |
| Weight min-max (Kg) | 1270 | 1470 | 1350 | 1550 |

PICKER®/FR *NEW*



80-160 HP



Hammers Ø 8 cm - Forestry Ø 12-15 cm



| | PICKER/FR 150 | | PICKER/FR 160 | | PICKER/FR 180 | | PICKER/FR 200 | | PICKER/FR 220 | |
|---------------------|------------------|------|------------------|------|------------------|------|------------------|------|------------------|------|
| Working width (cm) | 150 | | 160 | | 180 | | 200 | | 220 | |
| A hammers | 20 | | 22 | | 24 | | 26 | | 28 | |
| XF1 forestry tooth | 38 | | 42 | | 42 | | 44 | | 48 | |
| Weight min-max (Kg) | 960 | 1210 | 1020 | 1270 | 1150 | 1400 | 1280 | 1530 | 1410 | 1660 |



PICKER®/C



60-140 HP



Hammers Ø 8 cm - Forestry Ø 12-15 cm



| | PICKER/C 100 | PICKER/C 120 | PICKER/C 140 | PICKER/C 150 | PICKER/C 160 | PICKER/C 180 | | | | | | |
|-------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|------|------|------|------|------|
| Working width (cm) | 100 | 120 | 140 | 150 | 160 | 180 | | | | | | |
| A hammers | 14 | 16 | 18 | 20 | 22 | 24 | | | | | | |
| DF2 forestry tooth | / | / | 26 | 28 | 30 | 34 | | | | | | |
| Kompact discharge h. (cm) | / | / | 185 | 185 | / | / | | | | | | |
| Normal discharge h. (cm) | 230 | 230 | 230 | / | 230 | 230 | | | | | | |
| Super discharge h. (cm) | 305 | 305 | 305 | / | 305 | 305 | | | | | | |
| Kompact container M² | / | / | 1,70 | 1,85 | / | / | | | | | | |
| Normal container M³ | 1,50 | 1,80 | 2,10 | / | 2,40 | 2,70 | | | | | | |
| Super container M³ | 1,90 | 2,30 | 2,70 | / | 3,10 | 3,50 | | | | | | |
| Kompact container weight (kg) | - | - | - | - | 1460 | 1660 | 1570 | 1770 | - | - | - | - |
| Normal container weight (kg) | 1480 | 168 | 1560 | 176 | 1680 | 188 | - | - | 1790 | 199 | 1860 | 2060 |
| Super container weight (kg) | 1590 | 1790 | 1720 | 1920 | 1840 | 2040 | - | - | 1950 | 2150 | 2030 | 2230 |

PICKER[®]/R



70-140 HP



Hammers Ø 8 cm - Forestry Ø 12-15 cm



| | PICKER/R 160 | | PICKER/R 180 | | PICKER/R 200 NEW | |
|---------------------|--------------|------|--------------|------|---------------------|------|
| Working width (cm) | 160 | | 180 | | 200 | |
| A hammers | 22 | | 24 | | 26 | |
| DF2 forestry tooth | 30 | | 34 | | 38 | |
| Weight min-max (Kg) | 1190 | 1390 | 1240 | 1440 | 1290 | 1490 |



PICKER[®]/KARGO



60-140 HP



Hammers Ø 8 cm - Forestry Ø 12-15 cm



| | PICKER/KARGO 140 | | PICKER/KARGO 200 | |
|--------------------------|------------------|------|------------------|------|
| Working width (cm) | 140 | | 200 | |
| A hammers | 18 | | 22 | |
| DF2 forestry tooth | 26 | | 38 | |
| Container M ³ | 4,9 | | 7,8 | |
| Weight min-max (Kg) | 2650 | 3000 | 3570 | 4000 |



MULCHERS

FOR GREEN AREAS, SET-ASIDE, HEAVY VEGETATION





EKR



30-100 HP



Ø 2-3 cm



| | EKR 125 | | EKR 135 | | EKR 145 | | EKR 160 | | EKR 180 | | EKR 200 | |
|----------------------------|---------|-----|---------|-----|---------|-----|---------|-----|---------|------|---------|------|
| Working width (cm) | 125 | | 135 | | 145 | | 160 | | 180 | | 200 | |
| L or A hammers | 12 | | 12 | | 14 | | 14 | | 16 | | 18 | |
| YL or YA blades | 36 | | 36 | | 42 | | 42 | | 48 | | 54 | |
| Side shift (mm) | 615 | 635 | 615 | 720 | 615 | 835 | 715 | 885 | 780 | 1020 | 950 | 1050 |
| Weight min-max (Kg) | 300 | 355 | 315 | 370 | 330 | 380 | 360 | 400 | 480 | 520 | 520 | 560 |

EKR/M



60-100 HP



Ø 4-5 cm



| | EKR/M 180 | EKR/M 200 | EKR/M 220 NEW |
|---------------------|-----------|-----------|------------------|
| Working width (cm) | 180 | 200 | 220 |
| L hammers | 16 | 18 | 20 |
| YL blades | 48 | 54 | 60 |
| Side shift (mm) | 615 635 | 615 735 | 1140 1060 |
| Weight min-max (Kg) | 460 525 | 510 575 | 560 625 |



EKR/S



50-130 HP



Ø 4-5 cm



| | EKR/S 180 | | EKR/S 200 | | EKR/S 220 | | EKR/S 250 | | EKR/S 280 | | EKR/S 300 | |
|----------------------------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|
| Working width (cm) | 180 | | 200 | | 220 | | 250 | | 280 | | 300 | |
| A hammers | 16 | | 18 | | 20 | | 22 | | 26 | | 28 | |
| YA blades | 48 | | 54 | | 60 | | 66 | | 78 | | 84 | |
| Side shift (mm) | 1040 | 760 | 1210 | 790 | 1320 | 880 | 1320 | 1180 | 1610 | 1190 | 1610 | 1390 |
| | 520 | 1280 | 690 | 1310 | 800 | 1400 | 800 | 1700 | 1040 | 1760 | 1040 | 1960 |
| Weight min-max (Kg) | 560 | 710 | 600 | 740 | 630 | 770 | 690 | 830 | 890 | 1030 | 920 | 1060 |

BIMAX



70-130 HP



Ø 5-6 cm



STRENX

| | BIMAX 180 | | BIMAX 200 | | BIMAX 220 | | BIMAX 250 | | BIMAX 280 | | BIMAX 300 | |
|----------------------------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|
| Working width (cm) | 180 | | 200 | | 220 | | 250 | | 280 | | 300 | |
| A hammers | 16 | | 18 | | 20 | | 22 | | 26 | | 28 | |
| YA blades | 48 | | 54 | | 60 | | 66 | | 78 | | 84 | |
| Side shift (mm) | 1040 | 760 | 1210 | 790 | 1320 | 880 | 1320 | 1180 | 1610 | 1190 | 1610 | 1390 |
| | 520 | 1280 | 690 | 1310 | 800 | 1400 | 800 | 1700 | 1040 | 1760 | 1040 | 1960 |
| Weight min-max (Kg) | 560 | 710 | 600 | 740 | 630 | 770 | 690 | 830 | 890 | 1030 | 920 | 1060 |



DUAL



70-160 HP



Ø 6-8 cm



STRENX

| | DUAL 200 | | DUAL 230 | | DUAL 250 | | DUAL 280 | | DUAL 300 | |
|----------------------------|----------|------|----------|------|----------|------|----------|------|----------|------|
| Working width (cm) | 200 | | 230 | | 250 | | 280 | | 300 | |
| A hammers | 18 | | 20 | | 22 | | 26 | | 28 | |
| YA blades | 54 | | 60 | | 66 | | 78 | | 84 | |
| Side shift (mm) | 1040 | 960 | 1320 | 980 | 1320 | 1180 | 1610 | 1190 | 1610 | 1390 |
| | 520 | 1480 | 800 | 1500 | 800 | 1700 | 1090 | 1710 | 1090 | 1910 |
| Weight min-max (Kg) | 875 | 975 | 940 | 1040 | 990 | 1090 | 1070 | 1170 | 1110 | 1210 |

XPRO




100 -250 HP



Ø 8-10 cm



STRENX

| | XPRO 230 | XPRO 250 | XPRO 280 | XPRO 300 |
|---------------------|---|---|---|---|
| Working width (cm) | 230 | 250 | 280 | 300 |
| M hammers | 20 | 22 | 26 | 28 |
| Side shift (mm) |  |  |  |  |
| Weight min-max (Kg) | 1355 1645 | 1415 1705 | 1520 1810 | 1560 1850 |



XPRO/F



100-250 HP



Ø10-12 cm



STRENX

| | XPRO/F 200 | XPRO/F 230 | XPRO/F 250 | XPRO/F 280 | XPRO/F 300 |
|---------------------|------------|------------|------------|------------|------------|
| Working width (cm) | 200 | 230 | 250 | 280 | 300 |
| M hammers | 18 | 20 | 22 | 26 | 28 |
| Side shift (mm) | | | | | |
| Weight min-max (Kg) | 1320 1600 | 1410 1700 | 1475 1765 | 1585 1875 | 1630 1920 |

TBM



70 -110 HP



Ø 5-7 cm



STRENX

| | TBM 180 | | TBM 200 | | TBM 220 | | TBM 250 | | TBM 270 | |
|--|---------|------|---------|------|---------|------|---------|------|---------|------|
| Working width (cm) | 200 | | 230 | | 250 | | 280 | | 300 | |
| A hammers | 16 | | 18 | | 20 | | 22 | | 24 | |
| YA blades | 48 | | 54 | | 60 | | 66 | | 72 | |
| Side shift (mm) | 875 | 925 | 1040 | 960 | 1040 | 1160 | 1040 | 1460 | 1040 | 1660 |
| | 355 | 1445 | 520 | 1480 | 520 | 1680 | 520 | 1980 | 520 | 2180 |
| Side shift (central linkage) (mm) | / | | / | | / | | 1465 | 1035 | 1587 | 1113 |
| | | | | | | | 945 | 1555 | 1065 | 1635 |
| Weight min-max (Kg) | 735 | 815 | 780 | 870 | 820 | 920 | 905 | 1025 | 935 | 1070 |



TBM/S



80-150 HP



Ø 6-8 cm



STRENX

| | TBM/S 180 | | TBM/S 200 | | TBM/S 220 | | TBM/S 250 | | TBM/S 280 | | TBM/S 300 | |
|--|-------------|-------------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Working width (cm) | 180 | | 200 | | 220 | | 250 | | 280 | | 300 | |
| A or M hammers | 16 | | 18 | | 20 | | 22 | | 26 | | 28 | |
| YA blades | 48 | | 54 | | 60 | | 66 | | 78 | | 84 | |
| Side shift (mm) | 1050 530 | 750 1270 | 1050 530 | 950 1470 | 1050 530 | 1150 1670 | 1050 530 | 1450 1870 | 1050 530 | 1750 2270 | 1050 530 | 1950 2470 |
| Side shift (central linkage) (mm) | / | | / | | 1325 800 | 875 1400 | 1520 1000 | 980 1500 | 1616 1094 | 1184 1706 | 1616 1094 | 1384 1906 |
| Weight min-max (Kg) | 860 | 970 | 900 | 1030 | 945 | 1090 | 1010 | 1170 | 1090 | 1260 | 1135 | 1310 |



SHREDDERS

FOR STALKS, STRAW, OPEN FIELD CROP RESIDUES





TSB



60-140 HP



| | TSB 160 | TSB 180 | TSB 200 | TSB 220 | TSB 230 | TSB 250 | TSB 280 |
|---------------------|-----------|------------|------------|-------------|--------------------|-------------|-------------|
| Working width (cm) | 160 | 180 | 200 | 220 | 230 | 250 | 280 |
| 2YT blades | 40 | 44 | 48 | 52 | 56 | 60 | 68 |
| 3YT blades | 60 | 66 | 72 | 78 | 84 | 90 | 102 |
| T hammers | 20 | 22 | 24 | 26 | 28 | 30 | 34 |
| Side shift (mm) | 780 820 | 780 1020 | 780 1220 | 1060 1140 | 805 1195 1495 | 1060 1140 | 1350 1450 |
| Weight min-max (Kg) | 680 820 | 730 870 | 790 930 | 850 990 | 880 1020 | 1010 1150 | 1130 1270 |



LAND



70 -150 HP



STRENX

| | LAND 160 | LAND 180 | LAND 200 | LAND 230 | LAND 250 | LAND 280 | LAND 300 |
|---------------------|------------|------------|------------|---------------------------|-------------|-------------|-------------|
| Working width (cm) | 160 | 180 | 200 | 230 | 250 | 280 | 300 |
| 2YT2 blades | 40 | 44 | 48 | 56 | 60 | 68 | 72 |
| 3YT2 blades | 60 | 66 | 72 | 84 | 90 | 102 | 108 |
| T2 hammers | 20 | 22 | 24 | 28 | 30 | 34 | 36 |
| Side shift (mm) | 780 820 | 780 1020 | 780 1220 | 805 1495 1105 1195 | 1065 1435 | 1350 1450 | 1350 1650 |
| Weight min-max (Kg) | 870 1035 | 920 1085 | 970 1125 | 1090 1230 | 1160 1300 | 1280 1415 | 1320 1445 |



LAND/S



70-150 HP



| | LAND/S 160 | LAND/S 180 | LAND/S 200 | LAND/S 230 | LAND/S 250 | LAND/S 280 | LAND/S 300 |
|---------------------|--------------------------|--------------------------|--------------------------|---------------------------|---------------------------|----------------------------|----------------------------|
| Working width (cm) | 160 | 180 | 200 | 230 | 250 | 280 | 300 |
| 2YT2 blades | 40 | 44 | 48 | 56 | 60 | 68 | 72 |
| 3YT2 blades | 60 | 66 | 72 | 84 | 90 | 102 | 108 |
| T2 hammers | 20 | 22 | 24 | 28 | 30 | 34 | 36 |
| Side shift (mm) | 1042 + 558 520 1080 | 1042 + 758 520 1280 | 1042 + 958 520 1480 | 1215 + 1085 694 1606 | 1325 + 1175 803 1697 | 1615 + 1185 1094 1706 | 1615 + 1385 1094 1906 |
| Weight min-max (Kg) | 950 1115 | 1000 1165 | 1050 1205 | 1170 1310 | 1240 1380 | 1360 1495 | 1400 1525 |

KING/DT



90 -180 HP



| | KING/DT 200 | | KING/DT 270 | | KING/DT 320 | |
|---------------------|-------------|------|-------------|------|-------------|------|
| Working width (cm) | 200 | | 270 | | 320 | |
| 2YT2 blades | 48 | | 64 | | 80 | |
| 3YT2 blades | 72 | | 96 | | 120 | |
| T2 hammers | 24 | | 32 | | 40 | |
| Side shift (mm) | 1000 | 1000 | 1350 | 1350 | 1600 | 1600 |
| Weight min-max (Kg) | 1260 | 1590 | 1500 | 1830 | 1690 | 2090 |



LAND/P



120-300 HP



STRENX

| | LAND/P 400 | LAND/P 500 | LAND/P 600 |
|---------------------|-------------|-------------|-------------|
| Working width (cm) | 400 | 500 | 600 |
| 2YT2 blades | 96 | 120 | 144 |
| 3YT2 blades | 144 | 180 | 216 |
| T2 hammers | 48 | 60 | 72 |
| Side shift (mm) | 2000 2000 | 2500 2500 | 3000 3000 |
| Weight min-max (Kg) | 2530 3050 | 3090 3570 | 3600 4070 |



LAND/P SERIE BioG **NEW**



250 -380 HP



STRENX

LAND/P SERIE BIOG 600

| | | |
|---------------------|--------|--------|
| Working width (cm) | 600 | |
| T2 hammers | 72 | |
| Side shift (mm) | ← 3000 | 3000 → |
| Weight min-max (Kg) | 4480 | 4520 |



IN-LINE AND OFFSET MULCHERS

A wide-angle photograph of a lush green field, likely a pasture or meadow, with tall grasses in the foreground and a dense line of trees in the background under a cloudy sky. The text 'IN-LINE AND OFFSET MULCHERS' is overlaid in large, white, sans-serif font.



TA/K



30-50 HP



Ø 2 cm



| | TA/K 115 | | TA/K 125 | | TA/K 145 | |
|---------------------|----------|-----|----------|-----|----------|-----|
| Working width (cm) | 115 | | 125 | | 145 | |
| G hammers | 32 | | 34 | | 40 | |
| Weight min-max (Kg) | 300 | 345 | 310 | 355 | 330 | 375 |

TA/LI



40-70 HP



Ø 3-4 cm



| | TA/LI 135 | | TA/LI 145 | | TA/LI 160 | |
|---------------------|-----------|-----|-----------|-----|-----------|-----|
| Working width (cm) | 135 | | 145 | | 160 | |
| L hammers | 12 | | 14 | | 14 | |
| YL blades | 36 | | 42 | | 42 | |
| Weight min-max (Kg) | 435 | 515 | 445 | 525 | 460 | 540 |



TA/L



40-70 HP



Ø 3-4 cm



| | TA/L 115 | | TA/L 135 | | TA/L 145 | |
|---------------------|----------|-----|----------|-----|----------|-----|
| Working width (cm) | 115 | | 135 | | 145 | |
| L hammers | 10 | | 12 | | 14 | |
| YL blades | 30 | | 36 | | 42 | |
| Weight min-max (Kg) | 395 | 485 | 425 | 505 | 450 | 530 |

TA/MI



50-100 HP



Ø 4-5 cm



STRENX®

| | TA/MI 145 | | TA/MI 160 | | TA/MI 180 | | TA/MI 200 | |
|---------------------|-----------|-----|-----------|-----|-----------|-----|-----------|-----|
| Working width (cm) | 145 | | 160 | | 180 | | 200 | |
| P hammers | 14 | | 14 | | 16 | | 18 | |
| YP blades | 42 | | 42 | | 48 | | 54 | |
| Weight min-max (Kg) | 585 | 695 | 620 | 730 | 660 | 770 | 685 | 795 |



TA/M



50-100 HP



Ø 4-5 cm



STRENX

| | TA/M 145 | | TA/M 160 | | TA/M 180 | | TA/M 200 | |
|---------------------|----------|-----|----------|-----|----------|-----|----------|-----|
| Working width (cm) | 145 | | 160 | | 180 | | 200 | |
| P hammers | 14 | | 14 | | 16 | | 18 | |
| YP blades | 42 | | 42 | | 48 | | 54 | |
| Weight min-max (Kg) | 610 | 720 | 640 | 750 | 680 | 790 | 720 | 830 |

TA



80 -120 HP



Ø 7-8 cm



STRENX

| | TA 160 | | TA 180 | | TA 200 | | TA 220 | | TA 250 | |
|---------------------|--------|-----|--------|-----|--------|-----|--------|------|--------|------|
| Working width (cm) | 160 | | 180 | | 200 | | 220 | | 250 | |
| A hammers | 14 | | 16 | | 18 | | 20 | | 22 | |
| YA blades | 42 | | 48 | | 54 | | 60 | | 66 | |
| Weight min-max (Kg) | 780 | 885 | 815 | 925 | 855 | 975 | 900 | 1030 | 980 | 1110 |



TA/S



80-120 HP



Ø 7-8 cm



STRENX

| | TA/S 160 | | TA/S 180 | | TA/S 200 | | TA/S 220 | |
|---------------------|----------|-----|----------|-----|----------|------|----------|------|
| Working width (cm) | 160 | | 180 | | 200 | | 220 | |
| A hammers | 14 | | 16 | | 18 | | 20 | |
| YA blades | 42 | | 48 | | 54 | | 60 | |
| Weight min-max (Kg) | 810 | 915 | 845 | 955 | 885 | 1005 | 925 | 1055 |



TA/P



80-200 HP



Ø 10 cm



STRENX

| | TA/P 160 | | TA/P 180 | | TA/P 200 | | TA/P 220 | | TA/P 250 | |
|---------------------|----------|------|----------|------|----------|------|----------|------|----------|------|
| Working width (cm) | 160 | 180 | 180 | 200 | 200 | 220 | 220 | 240 | 250 | 250 |
| A hammers | 14 | 16 | 16 | 18 | 18 | 20 | 20 | 22 | 22 | 22 |
| YA blades | 42 | 48 | 48 | 54 | 54 | 60 | 60 | 66 | 66 | 66 |
| Weight min-max (Kg) | 940 | 1095 | 990 | 1145 | 1040 | 1195 | 1090 | 1245 | 1155 | 1310 |



TA/PS



90-200 HP



Ø 10 cm



STRENX

| | TA/PS 180 | | TA/PS 200 | | TA/PS 220 | | TA/PS 250 | |
|---------------------|-----------|------|-----------|------|-----------|------|-----------|------|
| Working width (cm) | 180 | | 200 | | 220 | | 250 | |
| A hammers | 16 | | 18 | | 20 | | 22 | |
| YA blades | 48 | | 54 | | 60 | | 66 | |
| Weight min-max (Kg) | 1015 | 1185 | 1060 | 1230 | 1110 | 1280 | 1175 | 1345 |

TA/MF *NEW*



150-250 HP



Ø 4-5 cm



STRENX

| | TA/MF 160 | | TA/MF 180 | | TA/MF 200 | | TA/MF 220 | |
|---------------------|-----------|------|-----------|------|-----------|------|-----------|------|
| Working width (cm) | 160 | | 180 | | 200 | | 220 | |
| A hammers | 14 | | 16 | | 18 | | 20 | |
| YA blades | 42 | | 48 | | 54 | | 60 | |
| Weight min-max (Kg) | 1050 | 1420 | 1100 | 1470 | 1150 | 1520 | 1200 | 1750 |



FORESTRY MULCHERS

FOR CLEARING OF UNCULTIVATED FIELDS, UNDER WOOD AND FORESTRY RESIDUES



KX *NEW*



60-110 HP



Ø 12-15 cm



HARDOX®



Smooth Cut forestry rotor

| | KX 150 | | KX 170 | | KX 190 | |
|---------------------|--------|-----|--------|-----|--------|-----|
| Working width (cm) | 150 | | 170 | | 190 | |
| XF2 forestry tooth | 48 | | 54 | | 60 | |
| Side shift (mm) | 750 | 750 | 850 | 850 | 950 | 950 |
| Weight min-max (Kg) | 690 | 810 | 770 | 890 | 850 | 970 |

ECF/MD



90-160 HP



Ø 15-18 cm



STRENX® HARDOX®

| | ECF/MD 160 | | ECF/MD 180 | | ECF/MD 200 | | ECF/MD 220 | |
|---------------------|------------|------|------------|------|------------|------|------------|------|
| Working width (cm) | 160 | | 180 | | 200 | | 220 | |
| DF hammers | 28 | | 32 | | 36 | | 40 | |
| MF hammers | 28 | | 32 | | 36 | | 40 | |
| MWF hammers | 28 | | 32 | | 36 | | 40 | |
| Side shift (mm) | 680 | 920 | 880 | 920 | 880 | 1120 | 1080 | 1120 |
| Weight min-max (Kg) | 1150 | 1355 | 1240 | 1445 | 1320 | 1535 | 1405 | 1620 |



EFX/MD



90-160 HP



Ø 20 cm



STRENX® HARDOX®



Smooth Cut forestry rotor

| | EFX/MD 160 | | EFX/MD 180 | | EFX/MD 200 | | EFX/MD 220 | |
|---------------------|------------|------|------------|------|------------|------|------------|------|
| Working width (cm) | 160 | | 180 | | 200 | | 220 | |
| XFI forestry tooth | 42 | | 42 | | 44 | | 48 | |
| Side shift (mm) | 680 | 920 | 880 | 920 | 880 | 1120 | 1080 | 1120 |
| Weight min-max (Kg) | 1165 | 1370 | 1230 | 1435 | 1290 | 1505 | 1370 | 1590 |

ECF



110-200 HP



Ø 25 cm



STRENX[®] HARDOX[®]

| | ECF 180 | | ECF 200 | | ECF 220 | |
|---------------------|---------|------|---------|------|---------|------|
| Working width (cm) | 180 | | 200 | | 220 | |
| DF hammers | 32 | | 36 | | 39 | |
| MF hammers | 32 | | 36 | | 39 | |
| MWF hammers | 32 | | 36 | | 39 | |
| Side shift (mm) | 900 | 900 | 1000 | 1000 | 1100 | 1100 |
| Weight min-max (Kg) | 1930 | 2400 | 2050 | 2500 | 2170 | 2650 |



EFX



110-200 HP



Ø 30 cm



STRENX[®] HARDOX[®]



Smooth Cut forestry rotor

| | EFX 200 | | EFX 220 | |
|-------------------------------|---------|------|---------|------|
| Working width (cm) | 200 | | 220 | |
| XF2 - XP - XWP forestry tooth | 44 | | 48 | |
| Side shift (mm) | 1000 | 1000 | 1100 | 1100 |
| Weight min-max (Kg) | 1940 | 2500 | 2040 | 2650 |

ECF/DT



110-250 HP



Ø 30 cm



STRENX® HARDOX®

| | ECF/DT 200 | ECF/DT 220 | ECF/DT 250 |
|---------------------|-------------|-------------|-------------|
| Working width (cm) | 200 | 220 | 250 |
| DF hammers | 36 | 39 | 45 |
| MF hammers | 36 | 39 | 45 |
| MWF hammers | 36 | 39 | 45 |
| Side shift (mm) | 1000 1000 | 1100 1100 | 1250 1250 |
| Weight min-max (Kg) | 2100 2450 | 2250 2620 | 2500 2880 |



EFX/DT



120-250 HP



Ø 40 cm



STRENX[®] HARDOX[®]



Smooth Cut forestry rotor

| | EFX/DT 200 | EFX/DT 220 | EFX/DT 250 |
|------------------------------|------------|------------|------------|
| Working width (cm) | 200 | 220 | 250 |
| XF - XP - XWP forestry tooth | 44 | 48 | 54 |
| Side shift (mm) | | | |
| Weight min-max (Kg) | 2000 2350 | 2140 2510 | 2380 2760 |

FOREST PRO



250-400 HP



Ø 50 cm



STRENX[®] HARDOX[®]



Smooth Cut forestry rotor

| | FOREST PRO 250 | |
|-------------------------|----------------|--------|
| Working width (cm) | 250 | |
| XP - XWP forestry tooth | 54 | |
| Side shift (mm) | 1250 ← | → 1250 |
| Weight min-max (Kg) | 3500 | 5000 |



ROTARY CHAIN MOWERS

FOR MOWING GRASS ON HEAVY STONY GROUND





TC/M



40 -80 HP



Ø 3-5 cm



| | TC/M 150 |
|--------------------|----------|
| Working width (cm) | 150 |
| Chains 680 | 2 |
| Weight (kg) | 395 |

TC/P



80 -110 HP



Ø 3-5 cm



HARDOX®



| | TC/P 180 |
|--------------------|----------|
| Working width (cm) | 180 |
| Chains G80 | 2 |
| Weight (kg) | 670 |



TC/PH



90 -110 HP



Ø 3-5 cm



HARDOX®




| | TC/PH 180 |
|--------------------|-----------|
| Working width (cm) | 180 |
| Chains 680 | 2 |
| Weight (kg) | 690 |



HYDRAULIC BOOM

HEDGE MOWERS

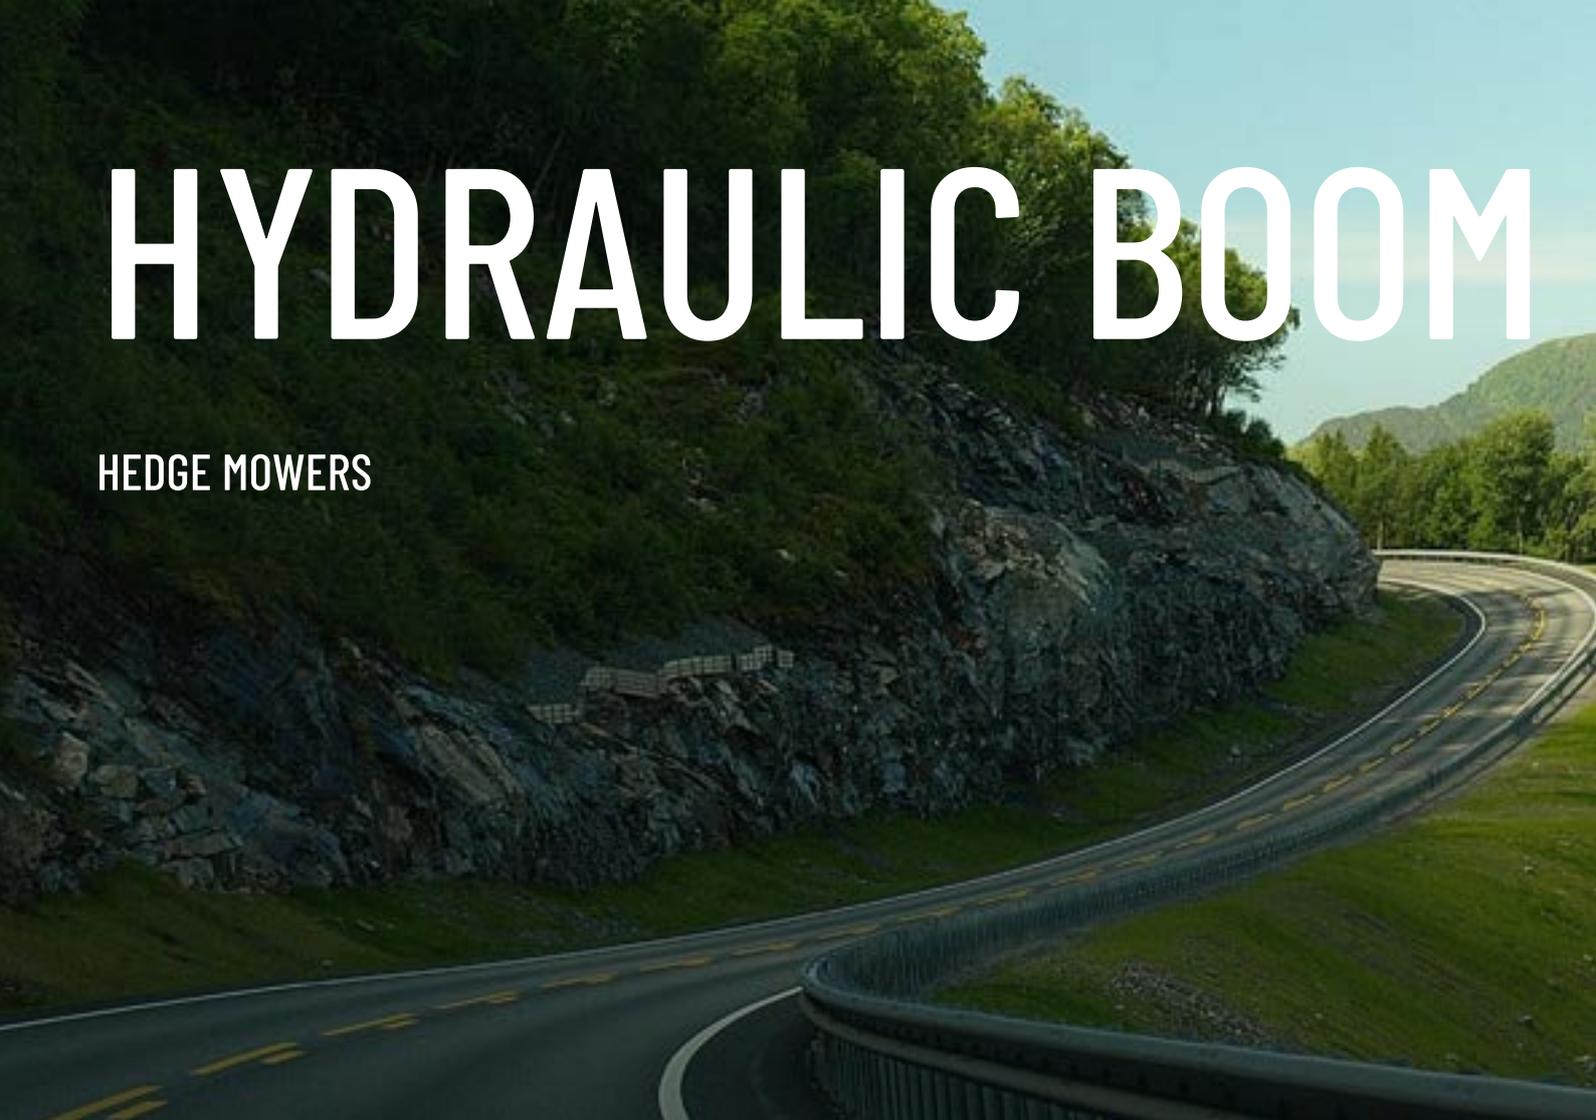



FB/X



20-30 HP



Ø 2 cm



| | FB/X |
|-----------------------------|------|
| Working width (cm) | 150 |
| Head rotation | 360° |
| Tank capacity (lt) | 40 |
| Minimum tractor weight (kg) | 700 |
| Weight (kg) | 280 |

FB/G 250-250S



20-30 HP



Ø 2 cm



| | FB/G 250 | FB/G 250 S |
|-----------------------------|----------|------------|
| Working width (cm) | 60 | 60 |
| Head rotation | 190° | 190° |
| Tank capacity (lt) | 70 | 70 |
| Y blades | 24 | 24 |
| Minimum tractor weight (kg) | 900 | 900 |
| Weight (kg) | 315 | 350 |



FB/G 300-300S-380-380S



40-60 HP



Ø 2 cm



| | FB/G 300 | FB/G 300 S | FB/G 380 | FB/G 380 S |
|-----------------------------|----------|------------|----------|------------|
| Working width (cm) | 80 | 80 | 80 | 80 |
| Head rotation | 190° | 190° | 190° | 190° |
| Tank capacity (lt) | 95 | 95 | 95 | 95 |
| Blades | 32 | 32 | 32 | 32 |
| Minimum tractor weight (kg) | 1300 | 1300 | 1400 | 1400 |
| Weight (kg) | 480 | 510 | 490 | 520 |

FB/PG 320



40-60 HP



Ø 3 cm



STRENX

| | FB/PG 320 |
|-----------------------------|-----------|
| Working width (cm) | 80 |
| Head rotation | 190° |
| Tank capacity (lt) | 95 |
| Blades | 32 |
| Minimum tractor weight (kg) | 1500 |
| Weight (kg) | 550 |



FB/PG 440-480



70-90 HP



Ø 4 cm



STRENX

| | FB/PG 440 | FB/PG 480 |
|-----------------------------|-----------|-----------|
| Working width (cm) | 100 | 100 |
| Head rotation | 190° | 190° |
| Tank capacity (lt) | 120 | 120 |
| Blades | 40 | 40 |
| Minimum tractor weight (kg) | 2600 | 3200 |
| Weight (kg) | 765 | 785 |

FB/P 400S-480-560



70-100 HP



Ø 4 cm



STRENX

| | FB/P 400S | FB/P 480 | FB/P 560 |
|-----------------------------|-----------|----------|----------|
| Working width (cm) | 100 | 100 | 100 |
| Head rotation | 190° | 190° | 190° |
| Tank capacity (lt) | 120 | 120 | 120 |
| Blades | 40 | 40 | 40 |
| Minimum tractor weight (kg) | 2400 | 2600 | 3000 |
| Weight (kg) | 700 | 740 | 760 |



FB/ARC STX 380



60-90 HP



Ø 3 cm



STRENX

FB/ARC 380 STX

| | |
|-----------------------------|------|
| Working width (cm) | 80 |
| Head rotation | 190° |
| Min arm width (cm) | 90 |
| Max arm height (cm) | 270 |
| Tank capacity (lt) | 95 |
| Blades | 32 |
| Minimum tractor weight (kg) | 2200 |
| Weight (kg) | 620 |

FB/ARC STX 430-600



80-100 HP



Ø 2 cm



STRENX

| | FB/ARC 430 STX | FB/ARC 600 STX |
|-----------------------------|----------------|----------------|
| Working width (cm) | 100 | 100 |
| Head rotation | 190° | 190° |
| Min arm width (cm) | 120 | 130 |
| Max arm height (cm) | 300 | 320 |
| Tank capacity (lt) | 125 | 125 |
| Blades | 40 | 40 |
| Minimum tractor weight (kg) | 3000 | 3500 |
| Weight (kg) | 920 | 960 |



FB/P 430



70-100 HP



Ø 4 cm



STRENX®

| | FB/P 430 |
|-----------------------------|----------|
| Working width (cm) | 100 |
| Head rotation | 245° |
| Tank capacity (lt) | 125 |
| Blades | 40 |
| Minimum tractor weight (kg) | 3000 |
| Weight (kg) | 880 |



FB/P 500-580



80-120 HP



Ø 5 cm



STRENX

| | FB/P 500 | FB/P 580 |
|-----------------------------|----------|----------|
| Working width (cm) | 100 | 100 |
| Head rotation | 245° | 245° |
| Tank capacity (lt) | 140 | 140 |
| Blades | 40 | 40 |
| Minimum tractor weight (kg) | 3500 | 3800 |
| Weight (kg) | 960 | 1080 |



FB/P 600



90-140 HP



Ø 5 cm



STRENX

| | FB/P 600 |
|-----------------------------|----------|
| Working width (cm) | 120 |
| Head rotation | 245° |
| Tank capacity (lt) | 225 |
| Blades | 48 |
| Minimum tractor weight (kg) | 4200 |
| Weight (kg) | 1370 |

FB/T 660-730



100-150 HP



Ø 5 cm



STRENX

| | FB/T 660 | FB/T 730 |
|-----------------------------|----------|----------|
| Working width (cm) | 120 | 120 |
| Head rotation | 245° | 245° |
| Tank capacity (lt) | 225 | 225 |
| Blades | 48 | 48 |
| Minimum tractor weight (kg) | 4500 | 5000 |
| Weight (kg) | 1420 | 1470 |



FB/P SA 500-600



90-150 HP



Ø 5 cm



STRENX

| | FB/P 500 SA | FB/P 600 SA |
|-----------------------------|-------------|-------------|
| Working width (cm) | 100 | 120 |
| Head rotation | 245° | 245° |
| Tank capacity (lt) | 140 | 225 |
| Blades | 40 | 48 |
| Minimum tractor weight (kg) | 3500 | 4800 |
| Weight (kg) | 1020 | 1430 |

FB/P A.H.G. 500-600



100-150 HP



Ø 5 cm



STRENX

| | FB/P 500 AHG | FB/P 600 AHG |
|-----------------------------|--------------|--------------|
| Working width (cm) | 100 | 120 |
| Head rotation | 245° | 245° |
| Tank capacity (lt) | 140 | 225 |
| Y blades | 40 | 48 |
| Minimum tractor weight (kg) | 4000 | 5000 |
| Weight (kg) | 1100 | 1540 |



STONE BURIERS





IS/K



15-28 HP



| | IS/K 90 | IS/K 100 | IS/K 120 |
|------------------------------------|---------|----------|----------|
| Working width (cm) | 90 | 100 | 120 |
| Working depth (cm) | 12 | 12 | 12 |
| No. of tools | 10+10 | 12+12 | 14+14 |
| Weight of skid version (kg) | 180 | 200 | 215 |
| Weight of net version (Ø 30 cm) kg | 220 | 240 | 260 |

IS/L



20-45 HP



| | IS/L 100 | IS/L 120 | IS/L 135 |
|---------------------------------------|----------|----------|----------|
| Working width (cm) | 101 | 117 | 133 |
| Working depth (cm) | 14 | 14 | 14 |
| No. of tools | 12+12 | 14+14 | 16+16 |
| Weight of skid version (kg) | 315 | 335 | 355 |
| Weight of net version (Ø 42 cm) kg | 370 | 405 | 435 |
| Weight of cage version (Ø 43 cm) kg | 345 | 375 | 410 |
| Weight of packer version (Ø 48 cm) kg | 325 | 415 | 445 |



IS/M



30-75 HP



| | IS/M 120 | IS/M 140 | IS/M 165 | IS/M 185 | IS/M 205 |
|---------------------------------------|----------|----------|----------|----------|----------|
| Working width (cm) | 120 | 140 | 165 | 185 | 205 |
| Working depth (cm) | 15 | 15 | 15 | 15 | 15 |
| No. of tools | 15+15 | 18+18 | 21+21 | 24+24 | 27+27 |
| Weight of skid version (kg) | 465 | 505 | 550 | 590 | 630 |
| Weight of net version (Ø 42 cm) kg | 545 | 590 | 635 | 680 | 720 |
| Weight of cage version (Ø 43 cm) kg | / | 570 | 620 | 665 | 700 |
| Weight of packer version (Ø 48 cm) kg | / | 685 | 735 | 775 | 860 |

IS/G *NEW*



50-120 HP



| | IS/G 165 | IS/G 185 | IS/G 205 | IS/G 230 | IS/G 250 |
|--|----------|----------|----------|----------|----------|
| Working width (cm) | 165 | 185 | 205 | 230 | 250 |
| Working depth (cm) | 15 | 15 | 15 | 15 | 15 |
| No. of tools | 21+21 | 24+24 | 27+27 | 30+30 | 33+33 |
| Weight of net version (Ø 41 cm) kg | 795 | 850 | 900 | 950 | 1010 |
| Weight of cage version (Ø 43 cm) kg | 675 | 720 | 745 | 797 | 847 |
| Weight of packer version (Ø 48 cm) kg | 775 | 840 | 885 | 957 | 1027 |



IS/H



100-170 HP



| | IS/H 250 | IS/H 280 | IS/H 300 |
|--|----------|----------|----------|
| Working width (cm) | 249 | 275 | 301 |
| Working depth (cm) | 23 | 23 | 23 |
| No. of tools | 27+27 | 30+30 | 33+33 |
| Weight of cage version (Ø 56 cm) kg | 1380 | 1505 | 1635 |
| Weight of packer version (Ø 57 cm) kg | 1540 | 1680 | 1825 |



IS/P



130-220 HP



| | IS/P 250 | IS/P 300 | IS/P 350 | IS/P 400 |
|--|----------|----------|----------|----------|
| Working width (cm) | 247 | 299 | 351 | 403 |
| Working depth (cm) | 26 | 26 | 26 | 26 |
| No. of tools | 27+27 | 33+33 | 39+39 | 45+45 |
| Weight of net version (Ø 56 cm) kg | 1900 | 2070 | 2320 | 2600 |
| Weight of cage version (Ø 56 cm) kg | 1800 | 2070 | 2285 | 2500 |
| Weight of packer version (Ø 57 cm) kg | 2000 | 2270 | 2520 | 2800 |



ROTARY TILLERS

The image shows a close-up, low-angle view of a field of dark brown, clumpy soil. The soil is uneven and appears to be the result of a rotary tillage operation, with many small clumps and some larger, irregular mounds. Scattered throughout the soil are numerous dry, light-brown plant stalks and stems, some of which are broken or partially buried. The background is a soft-focus landscape with a clear blue sky and a distant horizon line. The overall lighting is bright, suggesting a sunny day.




SOLE



15-25 HP



| | SOLE 90 | SOLE 100 | SOLE 120 |
|--------------------|---|---|---|
| Working width (cm) | 85 | 100 | 120 |
| Working depth (cm) | 12 | 12 | 12 |
| No. of tools | 10+10 | 12+12 | 14+14 |
| Side shift (mm) |  |  |  |
| Weight (kg) | 105 | 115 | 125 |

MERCURIO



20-40 HP



| | MERCURIO 100 | MERCURIO 120 | MERCURIO 135 | MERCURIO 150 | MERCURIO 165 |
|--------------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|
| Working width (cm) | 100 | 120 | 135 | 150 | 165 |
| Working depth (cm) | 15 | 15 | 15 | 15 | 15 |
| No. of tools | 18+18 | 21+21 | 24+24 | 27+27 | 30+30 |
| Side shift (mm) | 512 488 280 720 | 707 493 280 920 | 707 643 280 1070 | 817 683 280 1220 | 817 833 280 1370 |
| Weight (kg) | 275 | 290 | 310 | 325 | 345 |



MARTE



30-75 HP



| | MARTE 140 | MARTE 165 | MARTE 185 | MARTE 205 |
|--------------------|------------------|------------------|------------------|--------------------|
| Working width (cm) | 140 | 165 | 185 | 205 |
| Working depth (cm) | 15 | 15 | 15 | 15 |
| No. of tools | 18+18 | 21+21 | 24+24 | 27+27 |
| Side shift (mm) | 670 740 1090 | 810 820 1240 | 920 930 1330 | 1030 1040 1440 |
| Weight (kg) | 465 | 495 | 525 | 560 |

VENERE



20-35 HP



| | VENERE 90 | VENERE 100 | VENERE 120 | VENERE 135 |
|--------------------|-----------|------------|------------|------------|
| Working width (cm) | 85 | 101 | 117 | 133 |
| Working depth (cm) | 12 | 12 | 12 | 12 |
| No. of tools | 10+10 | 12+12 | 14+14 | 16+16 |
| Weight (kg) | 125 | 135 | 150 | 160 |



TERRA



15-40 HP



| | TERRA 90 | TERRA 100 | TERRA 120 | TERRA 135 | TERRA 150 | TERRA 165 | TERRA 180 |
|--------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Working width (cm) | 87 | 100 | 120 | 135 | 150 | 165 | 180 |
| Working depth (cm) | 14 | 14 | 14 | 14 | 14 | 14 | 14 |
| No. of tools | 10+10 | 12+12 | 14+14 | 16+16 | 18+18 | 20+20 | 22+22 |
| Weight (kg) | 195 | 210 | 225 | 240 | 250 | 265 | 285 |



NETTUNO



25-50 HP



| | NETTUNO 150 | NETTUNO 165 | NETTUNO 180 |
|--|----------------|----------------|----------------|
| Working width (cm) | 150 | 180 | 195 |
| Working depth (cm) | 15 | 15 | 15 |
| No. of tools | 27+27 | 30+30 | 33+33 |
| Weight of skid version (kg) | 295 | 310 | 325 |
| Weight of cage version (Ø 32 cm) kg | 358 | 382 | 405 |
| Weight of spikes version (Ø 45 cm) kg | 363 | 386 | 408 |
| Weight of net version (Ø 41 cm) kg | 405 | 435 | 460 |
| Weight of packer version (Ø 37 cm) kg | 405 | 435 | 465 |



URANO



30-75 HP



| | URANO 100 | URANO 120 | URANO 140 | URANO 165 | URANO 185 | URANO 205 | URANO 230 |
|--|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Working width (cm) | 100 | 120 | 140 | 165 | 185 | 205 | 230 |
| Working depth (cm) | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| No. of tools | 12+12 | 15+15 | 18+18 | 21+21 | 24+24 | 27+27 | 30+30 |
| Weight of skid version (kg) | 315 | 350 | 385 | 415 | 440 | 485 | 510 |
| Weight of cage version (Ø 32 cm) kg | 375 | 400 | 435 | 470 | 505 | 545 | 580 |
| Weight of spikes version (Ø 48 cm) kg | 365 | 405 | 440 | 475 | 505 | 545 | 580 |
| Weight of net version (Ø 42 cm) kg | 398 | 433 | 483 | 518 | 553 | 598 | / |
| Weight of packer version (Ø 37 cm) kg | 395 | 435 | 475 | 515 | 565 | 620 | 670 |

SATURNO



30-75 HP



| | SATURNO 120 | SATURNO 140 | SATURNO 165 | SATURNO 185 | SATURNO 205 | SATURNO 230 |
|---------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Working width (cm) | 120 | 140 | 165 | 185 | 205 | 230 |
| Working depth (cm) | 15 | 15 | 15 | 15 | 15 | 15 |
| No. of tools | 15+15 | 18+18 | 21+21 | 24+24 | 27+27 | 30+30 |
| Weight of skid version (kg) | 355 | 390 | 415 | 440 | 490 | 510 |
| Weight of cage version (Ø 32 cm) kg | 400 | 445 | 475 | 510 | 550 | 590 |
| Weight of spikes version (Ø 45 cm) kg | 410 | 455 | 495 | 520 | 580 | 615 |
| Weight of net version (Ø 42 cm) kg | 438 | 488 | 523 | 558 | 603 | / |
| Weight of packer version (Ø 37 cm) kg | 440 | 480 | 520 | 565 | 625 | 675 |



GIOVE



50-130 HP



| | GIOVE 155 | GIOVE 165 | GIOVE 185 | GIOVE 205 | GIOVE 230 | GIOVE 250 | GIOVE 280 | GIOVE 300 |
|---------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Working width (cm) | 154 | 164 | 186 | 208 | 230 | 252 | 273 | 295 |
| Working depth (cm) | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| No. of tools | 18+18 | 21+21 | 24+24 | 27+27 | 30+30 | 33+33 | 36+36 | 39+39 |
| Weight of skid version (kg) | 595 | 620 | 650 | 680 | 730 | 765 | 800 | 840 |
| Weight of cage version (Ø 43 cm) kg | / | 720 | 760 | 800 | 860 | 905 | 990 | 1050 |
| Weight of spikes version (Ø 48 cm) kg | / | 730 | 775 | 820 | 885 | 935 | 985 | 1035 |
| Weight of spiral version (Ø 47 cm) kg | / | 770 | 810 | 855 | 925 | 975 | 1030 | 1095 |
| Weight of net version (Ø 41 cm) kg | / | 860 | 910 | 975 | 1033 | 1088 | / | / |
| Weight of packer version (Ø 48 cm) kg | / | 840 | 900 | 960 | 1040 | 1105 | 1170 | 1235 |

POLARIS



100-170 HP



| | POLARIS 250 | POLARIS 280 | POLARIS 300 |
|--|----------------|----------------|----------------|
| Working width (cm) | 249 | 275 | 301 |
| Working depth (cm) | 23 | 23 | 23 |
| No. of tools | 27+27 | 30+30 | 33+33 |
| Weight of skid version (kg) | 1120 | 1225 | 1335 |
| Weight of cage version (Ø 56 cm) kg | 1360 | 1485 | 1615 |
| Weight of spikes version (Ø 55 cm) kg | 1400 | 1525 | 1655 |
| Weight of packer version (Ø 57 cm) kg | 1505 | 1645 | 1790 |



GIOVE BIO



60-130 HP



| | GIOVE BIO 155 | GIOVE BIO 165 | GIOVE BIO 185 | GIOVE BIO 205 | GIOVE BIO 230 | GIOVE BIO 250 | GIOVE BIO 280 | GIOVE BIO 300 |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Working width (cm) | 155 | 165 | 185 | 205 | 230 | 250 | 280 | 300 |
| Working depth (cm) | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| No. of tools | 18 + 18 | 21+21 | 24+24 | 27+27 | 30+30 | 33+33 | 36+36 | 39+39 |
| Weight of skid version (kg) | 740 | 780 | 820 | 860 | 900 | 930 | 970 | 1010 |

POLARIS BIO



100-170 HP



| | POLARIS BIO 250 | POLARIS BIO 280 | POLARIS BIO 300 |
|--------------------------------|--------------------|--------------------|--------------------|
| Working width (cm) | 249 | 275 | 301 |
| Working depth (cm) | 23 | 23 | 23 |
| No. of tools | 27+27 | 30+30 | 33+33 |
| Weight of skid version (kg) | 1365 | 1415 | 1460 |



LUNA



130-250 HP



| | LUNA 250 | LUNA 300 | LUNA 350 | LUNA 400 |
|---------------------------------------|----------|----------|----------|----------|
| Working width (cm) | 247 | 299 | 351 | 403 |
| Working depth (cm) | 26 | 26 | 26 | 26 |
| No. of tools | 27+27 | 33+33 | 39+39 | 45+45 |
| Weight of skid version (kg) | 1570 | 1610 | 1655 | 1700 |
| Weight of cage version (Ø 58 cm) kg | 1750 | 2000 | 2250 | 2500 |
| Weight of packer version (Ø 57 cm) kg | 1950 | 2200 | 2450 | 2740 |



POWER HARROWS





IONIO



20-40 HP



| | IONIO 90 | IONIO 110 | IONIO 130 | IONIO 150 | IONIO 170 |
|---------------------------------------|----------|-----------|-----------|-----------|-----------|
| Working width (cm) | 87 | 107 | 127 | 147 | 167 |
| Working depth (cm) | 21 | 21 | 21 | 21 | 21 |
| No. of tools | 4+4 | 6+4 | 6+6 | 8+6 | 8+8 |
| Weight of skid version (kg) | 195 | 225 | 240 | 275 | 305 |
| Weight of cage version (Ø 32 cm) kg | 215 | 250 | 275 | 305 | 33 |
| Weight of spikes version (Ø 45 cm) kg | - | 245 | 285 | 315 | 335 |
| Weight of net version (Ø 42 cm) kg | 265 | 290 | 315 | 335 | 385 |
| Weight of packer version (Ø 37 cm) kg | 260 | 290 | 325 | 335 | 390 |

TIRRENO



25-70 HP



| | TIRRENO 90 | TIRRENO 110 | TIRRENO 130 | TIRRENO 150 | TIRRENO 170 | TIRRENO 190 | TIRRENO 210 | TIRRENO 230 |
|---------------------------------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Working width (cm) | 90 | 110 | 130 | 150 | 170 | 190 | 210 | 230 |
| Working depth (cm) | 26 | 26 | 26 | 26 | 26 | 26 | 26 | 26 |
| No. of tools | 4+4 | 6+4 | 6+6 | 8+6 | 8+8 | 10+8 | 10+10 | 12+10 |
| Weight of cage version (Ø 32 cm) kg | 275 | 305 | 355 | 380 | 405 | 435 | 465 | 490 |
| Weight of spikes version (Ø 45 cm) kg | / | 305 | 350 | 385 | 415 | 460 | 485 | 515 |
| Weight of spiral version (Ø 38 cm) kg | / | / | / | / | / | 480 | 505 | 530 |
| Weight of net version (Ø 42 cm) kg | 285 | 335 | 385 | 425 | 455 | 500 | 550 | 580 |
| Weight of packer version (Ø 37 cm) kg | 325 | 355 | 385 | 415 | 445 | 485 | 535 | 570 |



ADRIATICO



40-110 HP



| | ADRIATICO 110 | ADRIATICO 130 | ADRIATICO 150 | ADRIATICO 180 | ADRIATICO 205 | ADRIATICO 230 | ADRIATICO 250 | ADRIATICO 30 |
|--|---------------|---------------|---------------|---------------|---------------|---------------|---------------|--------------|
| Working width (cm) | 106 | 130 | 154 | 178 | 201 | 225 | 248 | 295 |
| Working depth (cm) | 29 | 29 | 29 | 29 | 29 | 29 | 29 | 29 |
| No. of tools | 4+4 | 4+6 | 6+6 | 8+6 | 8+8 | 10+8 | 10+10 | 12+1 |
| Weight of cage version (Ø 43 cm) kg | 510 | 550 | 590 | 630 | 670 | 720 | 765 | 860 |
| Weight of spikes version (Ø 48 cm) kg | 510 | 550 | 590 | 640 | 690 | 740 | 790 | 830 |
| Weight of spiral version (Ø 47 cm) kg | / | / | 600 | 650 | 693 | 790 | 830 | 880 |
| Weight of net version (Ø 41 cm) kg | / | / | 710 | 765 | 825 | 868 | 933 | / |
| Weight of packer version (Ø 48 cm) kg | 505 | 570 | 660 | 725 | 780 | 845 | 920 | 960 |

ARTICO



80-120 HP



| | ARTICO 250 | ARTICO 300 |
|---------------------------------------|------------|------------|
| Working width (cm) | 248 | 295 |
| Working depth (cm) | 29 | 29 |
| No. of tools | 10+10 | 12+12 |
| Weight of cage version (Ø 43 cm) kg | 890 | 985 |
| Weight of spikes version (Ø 48 cm) kg | 905 | 995 |
| Weight of spiral version (Ø 47 cm) kg | 980 | 1060 |
| Weight of packer version (Ø 48 cm) kg | 1040 | 1150 |



INDIANO



80-150 HP



| | INDIANO 300 | INDIANO 360 | INDIANO 400 |
|--|----------------|----------------|----------------|
| Working width (cm) | 314 | 361 | 408 |
| Working depth (cm) | 28 | 28 | 28 |
| No. of tools | 12+12 | 14+14 | 16+16 |
| Weight of cage version (Ø 43 cm) kg | 1315 | 1480 | 1645 |
| Weight of spikes version (Ø 48 cm) kg | 1335 | 1500 | 1675 |
| Weight of spiral version (Ø 47 cm) kg | 1405 | 1585 | 1760 |
| Weight of packer version (Ø 48 cm) kg | 1480 | 1685 | 1895 |

ATLANTICO



120-230 HP



| | ATLANTICO 400 | ATLANTICO 450 | ATLANTICO 500 |
|--|------------------|------------------|------------------|
| Working width (cm) | 408 | 455 | 502 |
| Working depth (cm) | 28 | 28 | 28 |
| No. of tools | 16+16 | 18+18 | 20+20 |
| Weight of cage version (Ø 49 cm) kg | 1990 | 2080 | 2170 |
| Weight of spikes version (Ø 55 cm) kg | 2075 | 2155 | 2230 |
| Weight of spiral version (Ø 47 cm) kg | 2095 | 2175 | 2250 |
| Weight of packer version (Ø 48 cm) kg | 2155 | 2300 | 2425 |







BERTI MACCHINE AGRICOLE SPA

Via Musi 1/A-3-4

37042 Caldiero (Verona) - Italy

+39 045 61 39 711

bertima.it

info@bertima.it

follow us:



2025 REV10