



A name you can trust

MULCHERS

FOR PARKS, GREEN AREAS, LIGHT VEGETATION

ENGLISH

A background of a network diagram with grey nodes and lines on a light grey background. The text is overlaid in white.

A NAME

YOU CAN

TRUST

A solid orange horizontal bar at the bottom of the page.



BERTI

A NAME YOU CAN TRUST

Quality, strength and reliability: the foundations of our work.

Our mission is to offer sturdy, long-lasting equipment designed to minimise the risk of downtime and always ensure the best possible performance in the field.


We are a family that believes in the values of collaboration and trust. Every day, with passion and dedication, we create hundreds of machines designed to meet the genuine needs of those who work the land.

We strictly adhere to the highest quality standards, guided by a strong sense of ethics and the responsibility to provide custom solutions for every client.

We look to the future with energy and determination, ready to evolve so we can stay by your side, with products that continue to make a real difference.



INDEX

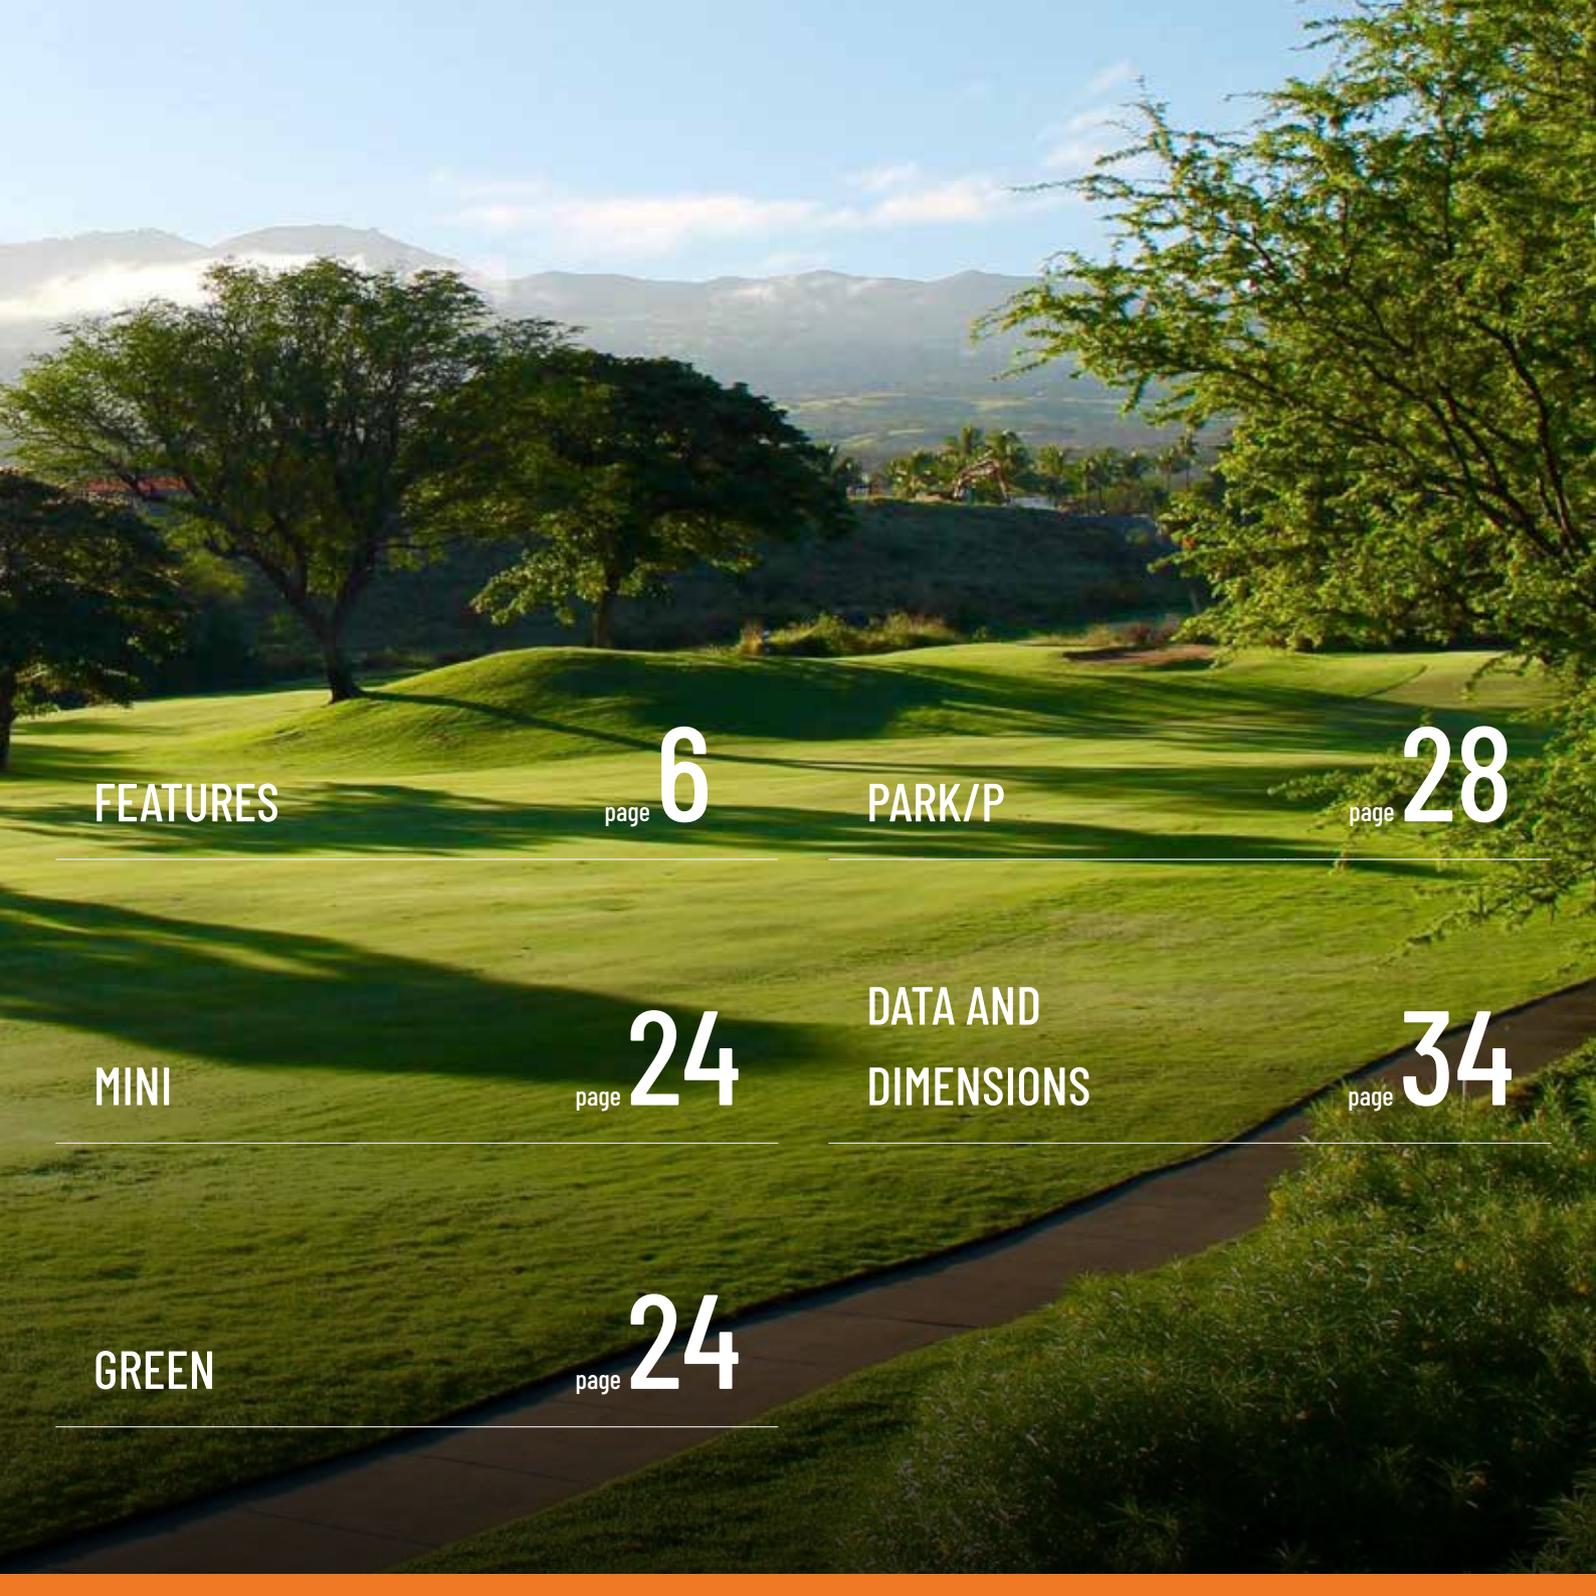

FEATURES

page **6**

PARK/P

page **28**

MINI

page **24**

DATA AND
DIMENSIONS

page **34**

GREEN

page **24**

ROTORS

& TOOL HOLDERS

The tube, produced by extrusion, requires no welding and is therefore seamless – a guarantee of strength and reliability. This manufacturing process provides enhanced resistance to accidental impacts.

Square recess tool holders – why is this better?

When it comes to shredding, each design detail makes a

difference. The tool holder is one such detail.

The choice between a hexagonal and a square recess affects not only the shape, it directly affects the holding strength and clamping of the component.

This design feature translates into increased reliability, durability, and operational safety.





The square recess allows for a more precise and stable mechanical connection between the tool (hammer or knife) and the holder.

This means:

- No play between parts, ensuring longer life of the holderbolt connection.

- Reduced risk of slippage or rotation of the bolt.
 - Greater resistance to dynamic and torsional stresses.
- Each Berti rotor is tested and balanced at high speeds to ensure top-quality performance.

MINI

MULCHER FOR GRASS AND LIGHT PRUNING



15-30 HP



Ø 2 cm



STANDARD EQUIPMENT

- Fixed and reversible 3-point linkage, Cat. I.
- Rear roller Ø 114, self-cleaning, height adjustable.
- Free wheel in the gearbox.
- Forged and hardened BERTI hammers type "G".
- PTO 540 rpm.
- Accident prevention protections according to EC directives.



ACCESSORIES ON REQUEST



Skids kit

height adjustable, with anti-wear shoe



Rubber fixed wheels

front mounted, height adjustable



Gearbox PTO 540/1000 rpm

with double free wheel and through shaft



PTO

drive shaft

GREEN

MULCHER FOR GRASS AND LIGHT PRUNING



25-60 HP



Ø 2-3 cm



HARDOX[®]
WEAR PLATE

STANDARD EQUIPMENT

- Displaceable and reversible 3-points linkage, on chromate tubes, Cat. I.
- Mechanical side-shift.
- Rear roller Ø 114, self-cleaning, height adjustable.
- Gearbox with free wheel and through shaft.
- Counter blades.
- Forged and hardened BERTI hammers type "G1".
- PTO 540 /1000 rpm (reverse pulleys).
- Accident prevention protections according to EC directives.




ACCESSORIES ON REQUEST



Hydraulic side-shift
with hoses and quick couplings



Skids kit
height adjustable, with anti-wear shoe

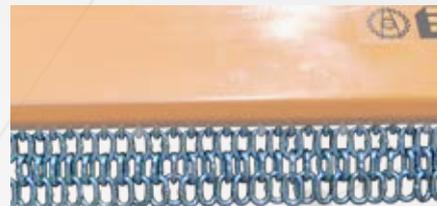

Front protectors
with chains



Rubber fixed wheels
front mounted, height adjustable



Gearbox PTO 540/1000 rpm
with double free wheel and through shaft



PTO
drive shaft

PARK/P

MULCHER FOR GRASS AND LIGHT PRUNING



25-60 HP



Ø 2-3 cm



STANDARD EQUIPMENT

- Displaceable 3-point linkage, Cat. I.
- Mechanical side-shift.
- Counter blades.
- Free wheel in the gearbox.
- Rear roller Ø 139, self-cleaning, height adjustable.
- Forged and hardened BERTI hammers type "L" or "YL" blades.
- PTO 540 /1000 rpm (reverse pulleys).
- Accident prevention protections according to EC directives.




ACCESSORIES ON REQUEST



Hydraulic side-shift
with hoses and quick couplings



Skids kit
height adjustable, with anti-wear shoe

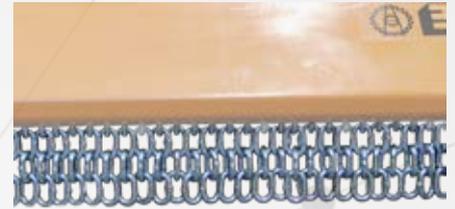

Front protectors
with chains



PTO
drive shaft



PARK/P at work



50 m

BEWAAR U BIJZONDER
LET OP DE AFSTAND
TUSSEN U EN DE
TOEGANGSPUNTEN
VAN DE WEGEN

DATA

AND DIMENSIONS

MODEL	cm	min	max	mm	n°	n°	n°	PTO	a	b	c	min	max	mm	mm
MINI 115	115	15	30		32	/	3	540	75	129	85	200	200	302	343
MINI 125	125	15	30		34	/	3	540	75	139	85	205	260	302	343
MINI 145	145	15	30		40	/	3	540	75	159	85	220	280	302	343
GREEN 115	115	25	60		32	/	2	540 (1000)	80	130	95	250	300	334	387
GREEN 125	125	30	60		34	/	2	540 (1000)	80	140	95	270	320	334	387
GREEN 145	145	30	60		40	/	2	540 (1000)	80	160	95	295	345	334	387
GREEN 160	160	30	60		44	/	2	540 (1000)	80	175	95	315	365	334	387



MODEL	cm	min	max	mm	n°	n°	n°	PTO	a	b	c	min	max	mm	mm
GREEN 180	180	30	60		50	/	2	540 (1000)	80	195	95	345	395	334	387
PARK/P 105	105	25	60		10	30	2	540 (1000)	79	120	80	265	320	364	407
PARK/P 115	115	25	60		10	30	2	540 (1000)	79	130	80	280	340	364	407
PARK/P 125	125	30	60		12	36	2	540 (1000)	79	140	80	295	350	364	407
PARK/P 135	135	30	60		12	36	2	540 (1000)	79	150	80	310	360	364	407
PARK/P 145	145	40	60		14	42	2	540 (1000)	79	160	80	320	375	364	407
PARK/P 160	160	40	60		14	42	2	540 (1000)	79	175	80	355	405	364	407
PARK/P 180	180	40	60		16	48	3	540 (1000)	79	195	80	370	430	364	407



A background of a network diagram with grey nodes and connecting lines on a light grey gradient.

**A NAME
YOU CAN
TRUST**



BERTI MACCHINE AGRICOLE SPA

Via Musi 1/A-3-4

37042 Caldiero (Verona) - Italy

+39 045 61 39 711

bertima.it

info@bertima.it

follow us:

